

Data Sheet Rev 01.1220

515nm Green Dot Laser Diode Modules, 12mm Diameter, 3-5VDC

GMP515 Series



Overview

The Lasermate GMP515 series laser modules are 515nm green diode laser modules with Automatic Power Control (APC) circuit design and compact dimensions of 12mm diameter.

Features

- 515nm green laser diode module
- Automatic Power Control (APC) circuit design
- Compact size
- Power output stability 5%
- Circular beam profile

Applications

- Pointing
- Leveling
- Sensing

Product Overview

| Part Number | Wavelength (nm) | Optical output power (mW) | Laser class | Operating voltage (V DC) | Operating Current (mA) | Operating temperature (°C) |
|-------------|--------------------|---------------------------------|----------------|-----------------------------|---------------------------|-------------------------------|
| GMP515-1F5 | 515 | 0.5-0.99 | П | 3-5 | <300 | -10 to +50 |
| GMP515-5F5 | 515 | 3-4.99 | Illa | 3-5 | <300 | -10 to +50 |


Specifications of GMP515 Series 515nm Green Laser Diode Modules

| Model Number | GMP515-XF5 | | | | |
|---|--|---------------------|--|--|--|
| Wavelength | 515+/-10 nm | | | | |
| Output Power (mW) @ 25 °C | 0.5-0.99 (X=1) | 3-4.99 (X=5) | | | |
| Laser Class | Class II | Class IIIa | | | |
| Operating Current ⁽¹⁾ @ 25 °C | <300mA (typical 250mA @ 3VDC, typical 150mA @ 5VDC) | | | | |
| Operating Voltage | 3-5V DC | | | | |
| Circuit Design | APC (Automatic Power Control) | | | | |
| Operation Mode | CW | | | | |
| Beam Profile | Circular | | | | |
| Beam Divergence | < 1 mrad | | | | |
| Beam Mode | TEM ₀₀ | | | | |
| Beam Diameter | < 2mm at aperture | | | | |
| Stability ⁽²⁾ | ≤ ±5% @ constant temperature | | | | |
| Connector | Black wire (-); red wire (+) | | | | |
| Housing | Anodized aluminum | | | | |
| Operating Temperature | -10 to 50 °C | | | | |
| Storage Temperature | -10 to 70 °C | | | | |
| Dimensions (LxWxH) | \varnothing 12mm x L. 17.5+/-0.5 mm (Anodized aluminum housing) + W. 11mm x L. 18mm (driver circuit board) | | | | |

Notes:

- 1. If you run this laser module with DC power supply, please set the current of DC power supply between 1A and 0.9A.
- 2. Additional heat sink or cooling fan may be needed to disperse the heat and to avoid the laser module from becoming overheated.

Mechanical Outline (unit: mm)

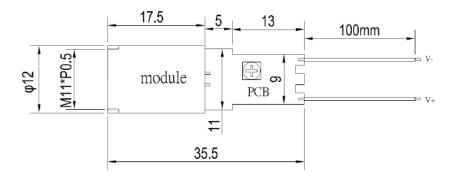

Additional Notes

- The GMP515 series laser modules are designated solely as OEM components for incorporation into the customer's end products. Therefore, it is the customer's responsibility to comply with FDA requirements of FDA 21CFR, section 1040.10 and 1040.11 for complete laser products. For the code of FDA regulations, please refer to <u>FDA</u>
 <u>Performance Standards for Light-Emitting Products</u> for detailed information.
- Specifications are subject to change without notice.



Lasermate Group, Inc. 19608 Camino De Rosa Walnut, CA 91789 USA Tel: (909)718-0999 Fax: (909)718-0998 sales@lasermate.com www.lasermate.com