



100GBASE-PSM4 1310nm SMF 2km QSFP28 Optical Transceiver with Duplex MPO Connector

100GSMSFPCM



DESCRIPTION

The 100GSMSFPCM QSFP28 transceiver modules are designed for use in 100 Gigabit Ethernet links on up to 2 km of single mode fiber. They are compliant with the QSFP28 MSA, CWDM4 MSA and portions of IEEE P802.3bm. Digital diagnostics functions are available via the I2C interface, as specified by the QSFP28 MSA.

FEATURES

- Hot-pluggable QSFP28 form factor
- Power dissipation < 3.5W
- Single 3.3V power supply
- Loss budget of 5 dB on up to 2km of SMF [with KR4 FEC]
- RoHS-6 Compliant (lead-free)
- Case temperature range of 0°C to +70°C
- 4x25 Gb/s transmitter
- 4x25G retimed electrical interface
- MPO optical connector
- I2C management interface
- Up to 2km over single mode fiber

APPLICATION

- 100GBASE-PSM4
- Ethernet Switch
- Data Center Backbone

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	MIN	MAX	UNIT
Storage Temperature	T_S	-40	85	°C
Power Supply Voltage	V_{CC}	-0.5	3.6	V
Relative Humidity	RH	5	85	%

Note: Exceeding these values may cause permanent damage. Function operation under these conditions is not implied.

RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNIT
Case Operating Temperature	T_C	0		70	°C
Power Supply Voltage	V_{CC}	3.14	3.3	3.47	V
Power Dissipation				2.5	W

TRANSMITTER OPTICAL CHARACTERISTICS

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNIT
Operating Data Rate	DR		25.78125		Gbps
Average Launch Power, each lane		-9.4		+2	dBm
Extinction Ratio	ER	3.5			dB
Optical Modulation Amplitude, per lane	P_{oma}	-5.15		2.2	dBm
Center Wavelength	λ_C	1295		1325	nm
Side Mode Suppression	SMSR	-30			dB
Transmitter Reflectance	R_T			-12	dB
Disable Output Power	P_{o_off}			-30	dBm
Output Eye Mask Definition {X1, X2, X3, Y1, Y2, Y3}		{0.31, 0.4, 0.45, 0.34, 0.38, 0.4}			


RECEIVER OPTICAL CHARACTERISTICS

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNIT
Receive Saturation (OMA), per lane	Rmax	2			dBm
Damage Threshold, per lane		3			dBm
Average Receiver Power, each lane		-12.66		2	dBm
Unstressed Receiver Sensitivity (OMA), per lane	Rxsens			-10	dBm
Conditions of stressed receiver sensitivity test:					
SRS eye mask definition {X1, X2, X3, Y1, Y2, Y3}		{0.39, 0.5, 0.5, 0.39, 0.3, 0.4}			
LOS De-Assert	LOSD			-13	dBm
LOS Assert	LOSA	-24			dBm
LOS Hysteresis			1.5		dB

ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	MIN	TYP.	MAX	UNIT
Data Rate, per lane			25.78125		Gbps
LP Mode/Reset/ModselL	VIL	-0.3		0.8	V
LP Mode/Reset/ModselL	VIH	2		$V_{CC}+0.3$	V
ModPrsL/IntL	VOL	0		0.4	V
ModPrsL/IntL	VOH	$V_{CC}-0.5$		$V_{CC}+0.3$	V

PAD ASSIGNMENT AND DESCRIPTION

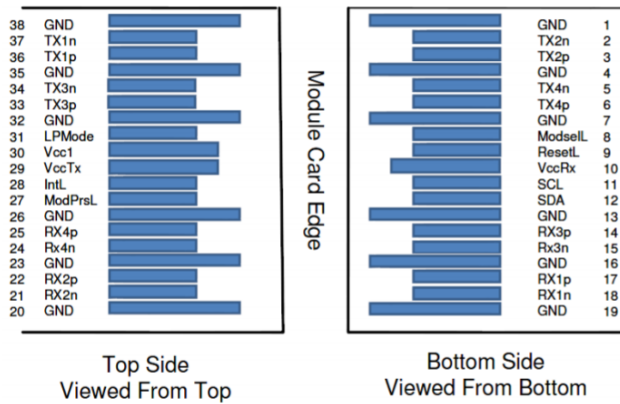


"PIN	LOGIC	SYMBOL	DESCRIPTION	PLUG SEQUENCE	NOTE
1		GND	Ground	1	Note 1
2	CML-I	Tx2n	Transmitter Inverted Data Input	3	
3	CML-I	Tx2p	Transmitter Non-Inverted Data Input	3	
4		GND	Ground	1	Note 1
5	CML-I	Tx4n	Transmitter Inverted Data Input	3	
6	CML-I	Tx4p	Transmitter Non-Inverted Data Input	3	
7		GND	Ground	1	Note 1
8	LVTTL-I	ModSelL	Module Select	3	
9	LVTTL-I	ResetL	Module Reset	3	
10		Vcc Rx	+3.3V Power Supply Receiver	2	Note 2
11	LVC MOS-I/O	SCL	2-wire serial interface clock	3	
12	LVC MOS-I/O	SDA	2-wire serial interface data	3	
13		GND	Ground	1	Note 2
14	CML-O	Rx3p	Receiver Non- Inverted Data Output	3	
15	CML-O	Rx3n	Receiver Inverted Data Output	3	
16		GND	Ground	1	Note 1
17	CML-O	Rx1p	Receiver Non- Inverted Data Output	3	
18	CML-O	Rx1n	Receiver Inverted Data Output	3	
19		GND	Ground	1	Note 1
20		GND	Ground	1	Note 1
21	CML-O	Rx2n	Receiver Inverted Data Output	3	
22	CML-O	Rx2P	Receiver Non- Inverted Data Output	3	
23		GND	Ground	1	Note 1
24	CML-O	Rx4n	Receiver Inverted Data Output	3	
25	CML-O	Rx4p	Receiver Non- Inverted Data Output	3	
26		GND	Ground	1	Note 1
27	LVTTL-O	ModPrsL	Module Present	3	
28	LVTTL-O	IntL	Interrupt	3	
29	LVC MOS-I/O	Vcc Tx	+3.3V Power Supply transmitter	2	Note 2
30		Vcc1	+3.3V Power Supply	2	Note 2
31	LVTTL-I	LPMODE	Low Power Mode	3	
32		GND	Ground	1	Note 1
33	CML-I	Tx3p	Transmitter Non- Inverted Data Input	3	
34	CML-I	Tx3n	Transmitter Inverted Data Input	3	
35		GND	Ground	1	Note 1
36	CML-I	Tx1p	Transmitter Non- Inverted Data Input	3	
37	CML-I	Tx1n	Transmitter Inverted Data Input	3	
38		GND	Ground	1	Note 1


Note 1: GND is the symbol for signal and supply (power) common for the QSFP module. All are common within the QSFP+ module and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal-common ground plane.

Note 2: Vcc Rx, Vcc1 and Vcc Tx are the receiver and transmitter power supplies and shall be applied concurrently. Requirements defined for the host side of the Host Edge Card Connector are listed in Table. Recommended host board power supply filtering is shown in Host board power supply circuit. Vcc Rx Vcc1 and Vcc Tx may be internally connected within the QSFP+ module in any combination. The connector pins are each rated for a maximum current of 500 mA.


RECOMMENDED INTERFACE CIRCUIT

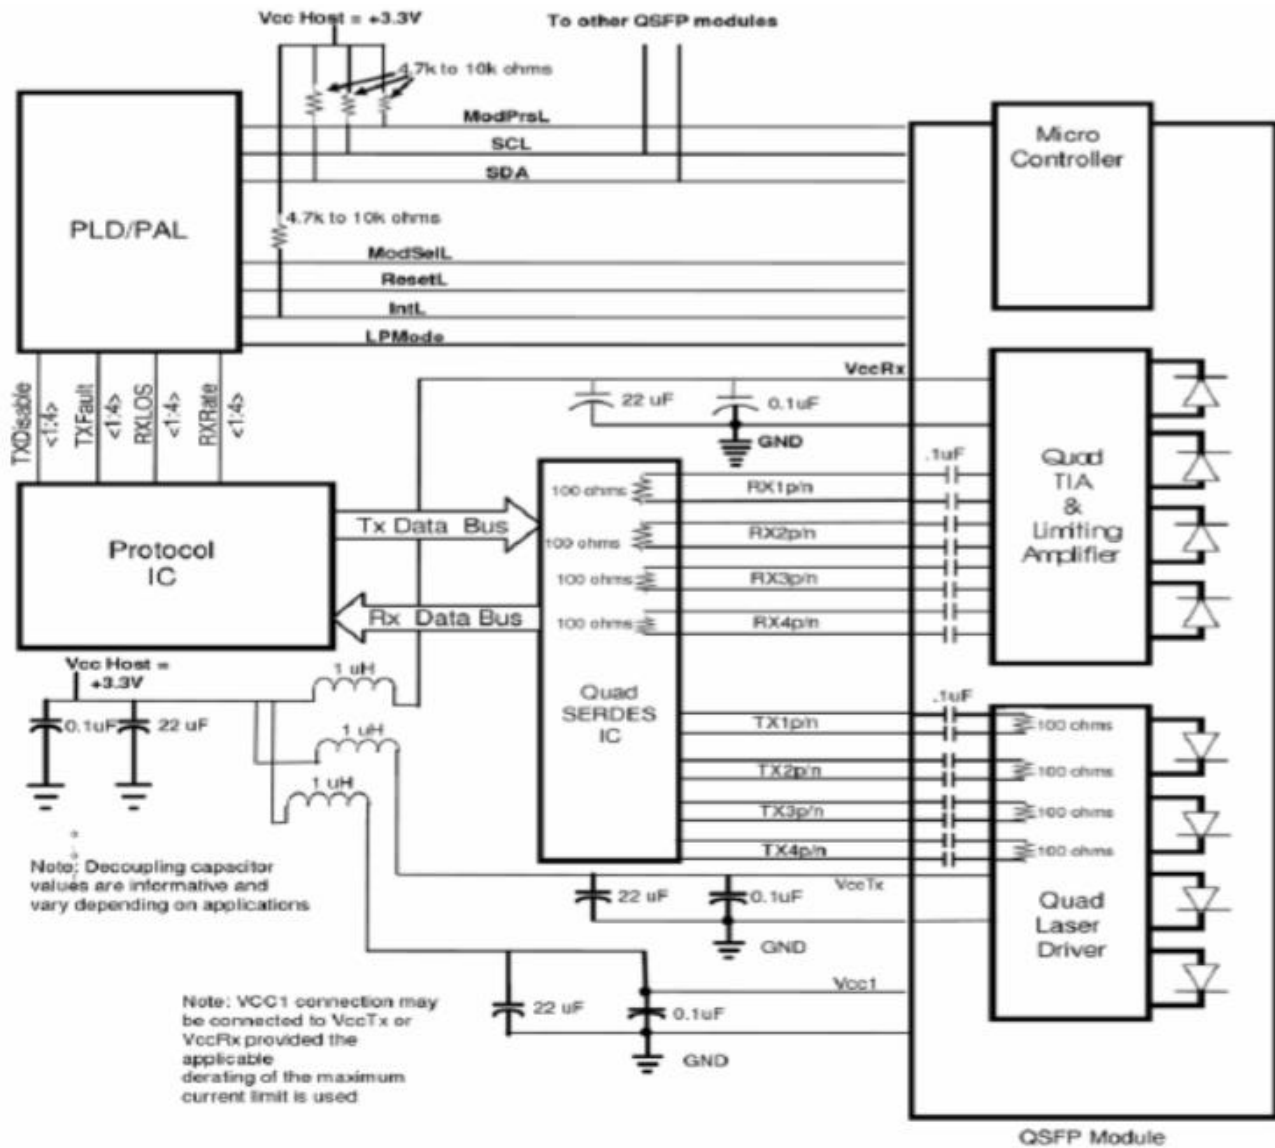


DIMENSIONS (unit: mm)

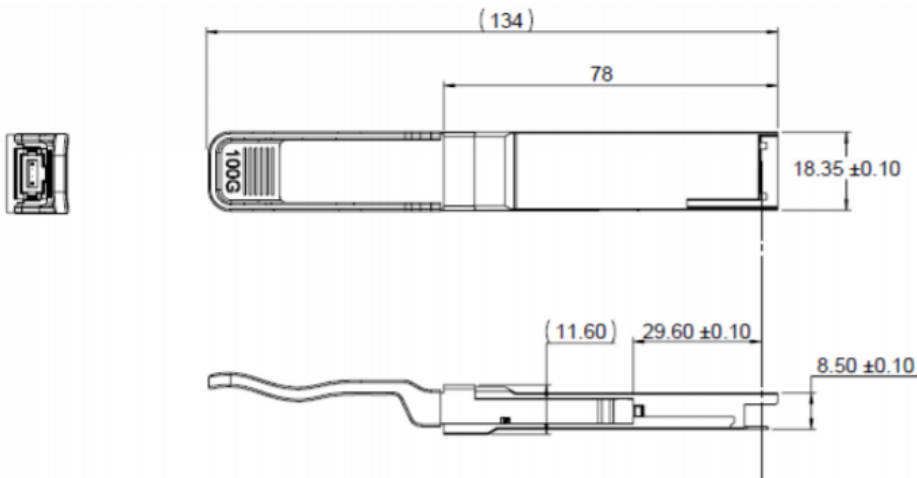

[Attention] To minimize MPO connection induced reflections, an MPO receptacle with 8-degree angled end-face is utilized for this product. A male MPO connector with 8-degree end-face should be used with this product as illustrated below.

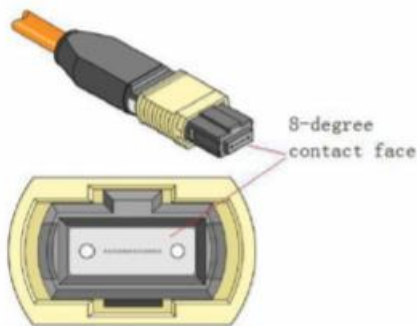


HOST BOARD POWER SUPPLY CIRCUIT

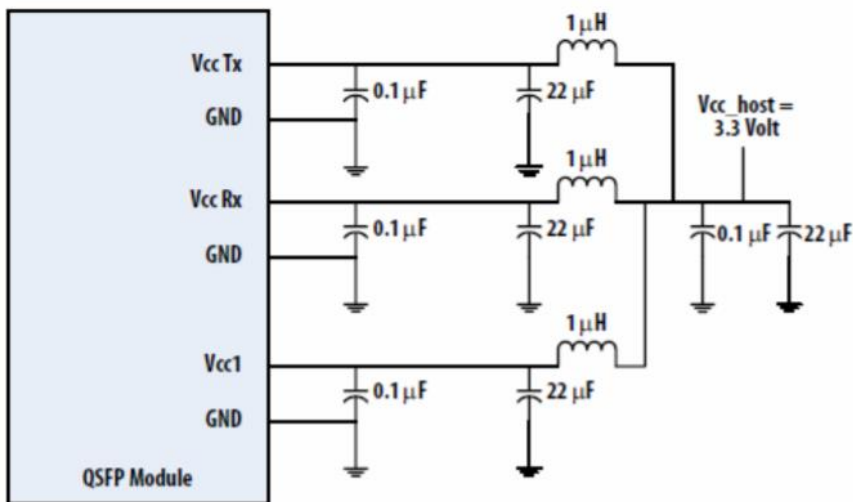

MEMORY MAP

The memory map is structured as a single address and multiple page approaches, according to the QSFP+ SFF-8436 MSA specification as shown in the below. For more detailed description of this memory map or lower pages, please see our Memory Map document with flexible customization settings.

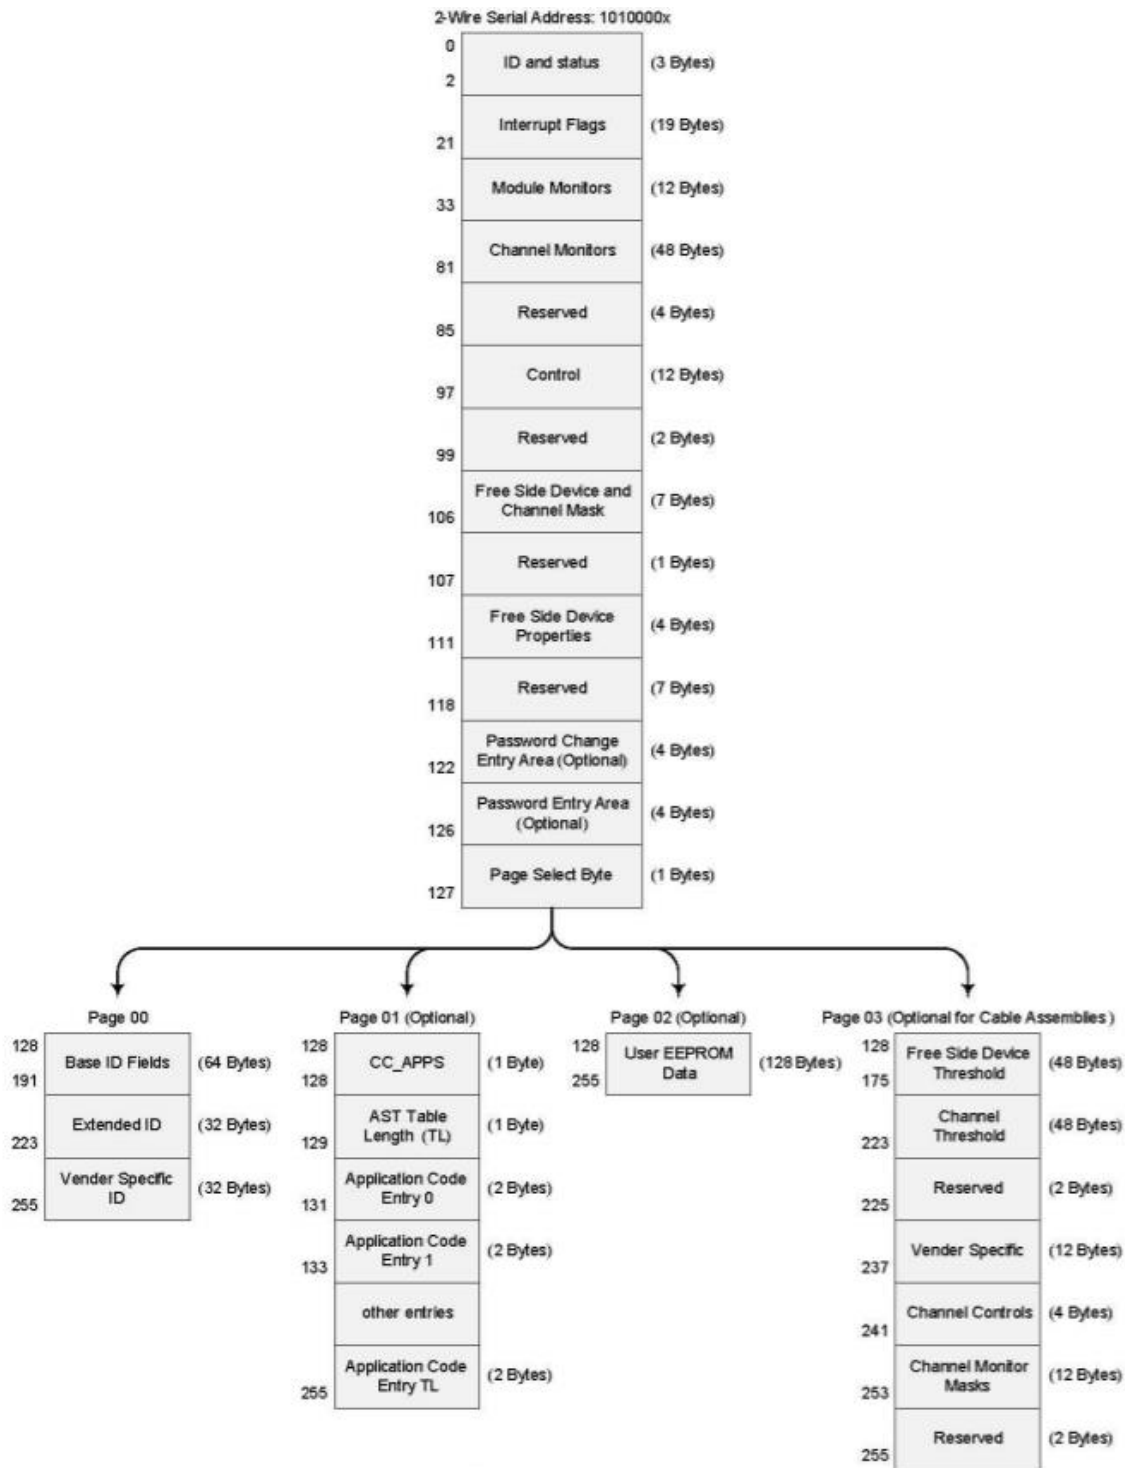

ADDITIONAL NOTES

- Avoid eye or skin exposure to laser radiations.
- The device is sensitive to electro-static discharge (ESD). The device should be handled with ESD proof tools. To assemble the device on PCB, proper grounding is required to prevent ESD.
- Specifications are subject to change without notice.



Lasermate Group, Inc.
19608 Camino De Rosa
Walnut, CA 91789 USA
Tel: (909)718-0999
Fax: (909)718-0998
sales@lasermate.com
www.lasermate.com