



940nm 500mW CW VCSEL Diode with Diffuser, 3535 SMD Package

VCD35A-940C500x



Description

The Lasermate VCD35A-940C500x is an 940nm wavelength, 500mW output power, CW operating mode, Vertical Cavity Surface Emitting Laser (VCSEL) diode with diffuser in surface mount (SMD) package designed for use in sensing applications.

Features

- Surface mount SMD package with Diffuser
- Single wavelength
- Low wavelength drift
- Oxide isolation technology
- Low threshold current
- Easy to collimate
- 500mW 940nm VCSEL @ 750mA

Applications

- Proximity sensor
- Gesture recognition
- IR illumination
- Medical application
- Broadband access network
- Smart home application

Product Overview

The following table lists the available part numbers, as well as the package type and diffuser beam angle of each of the part numbers.

Part Number	Package	Diffuser Beam Angle
VCD35A-940C500A	3535 Package, Substrate AlN	60°x45°
VCD35A-940C500B	3535 Package, Substrate AlN	72°x58°
VCD35A-940C500C	3535 Package, Substrate AlN	90°x70°
VCD35A-940C500D	3535 Package, Substrate AlN	110°x85°
VCD35A-940C500E	3535 Package, Substrate AlN	120°x90°

Specifications

Absolute Maximum Ratings				
Parameters	Symbol	Rating	Unit	Conditions
Case Operating Temperature	Top	-40 to 65	°C	
Storage Temperature	Tstg	-40 to 85	°C	
Reflow Soldering Temperature	Tsol	260	°C	<10 seconds
Reverse Voltage	Vr	3	V	
Maximum Continuous Current	I _{max}	1	A	
ESD Exposure (Human Body) Model	ESD	2K	V	

Notes:


- Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or other conditions above those indicated in the operations section for expanded periods of time may affect reliability.
- In its maximum rating diode laser operation could damage its performance or cause potential safety hazard such as equipment failure.
- Electrostatic discharge is the main reason for laser fault of the diode. Take effective precautions against ESD. When dealing with laser diodes, use wrist strap, grounding work surface and strict antistatic technology.

Electro-Optical Characteristics (T _{op} =25°C, CW Mode)						
Parameters	Symbol	Min.	Typ.	Max.	Unit	Conditions
Optical Output Power	P _o	-	500	-	mW	I _f =750mA
Threshold Current	I _{th}	-	100	-	mA	
Forward Current	I _F	-	750	-	mA	
Power Conversion Efficiency	η	-	31	-	%	I _f =750mA
Slope Efficiency	SE	-	0.59	-	W/A	I _f =750mA
Peak Wavelength	λ _p	930	940	950	nm	I _f =750mA
Spectral Width	FWHM _s	-	2.5	-	nm	
Forward Voltage	V _f	-	2.17	-	V	I _f =750mA
Series Resistance	R	-	0.69	-	Ohm	I _f =750mA
Wavelength Temperature Drift	Δλ _p / ΔT	-	-	0.07	nm/°C	I _f =750mA
Beam Divergence	FWHM _B	-	20	-	deg	
Emission Area		-	370x370	-	mm ²	
Number of Emission Aperture		-	116	-		
Substrate					AIN	


Note: Electro-optical characteristic with a package or diffuser would require further evaluation. Values are based on limited sample size and estimated values.

Typical Characteristics

LIV Graph

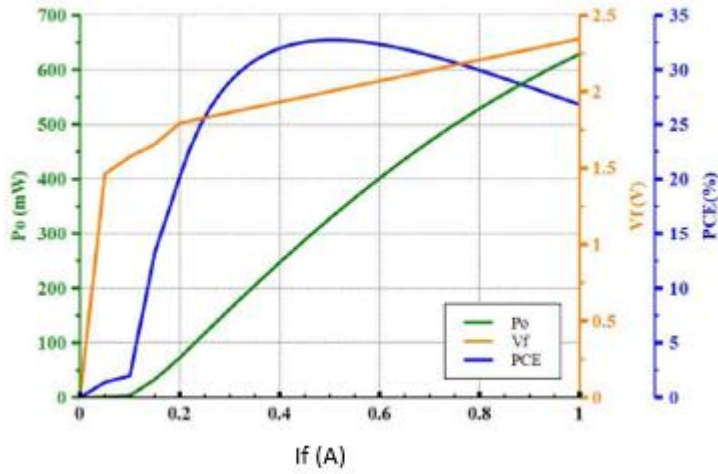


Intensity vs. Wavelength

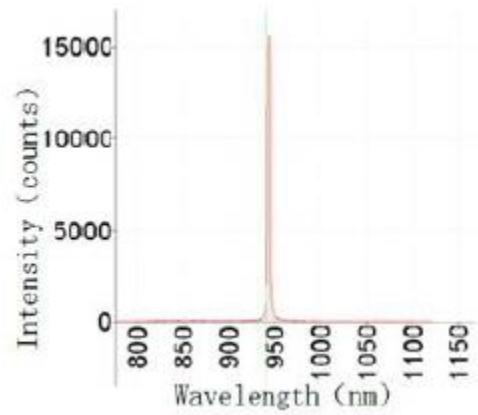


Typical Laser Spot and Beam Profile with Diffuser


Beam angle: 60°x45°

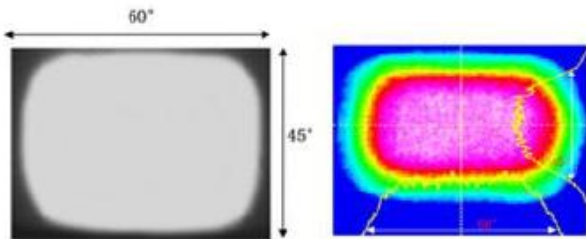


Beam angle: 72°x58°

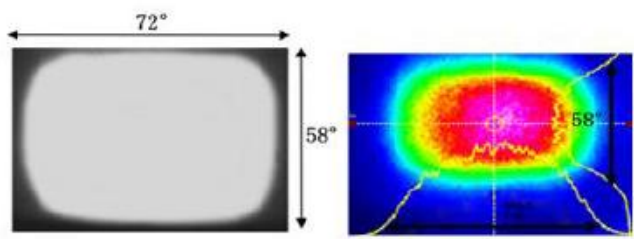


Beam angle: 90°x70°

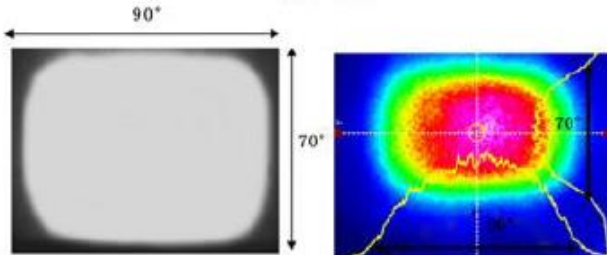


Beam angle: 110°x85°

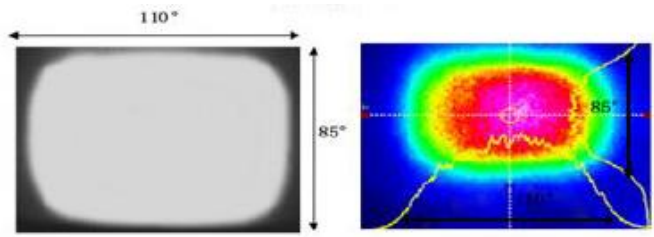


Beam angle: 120°x90°

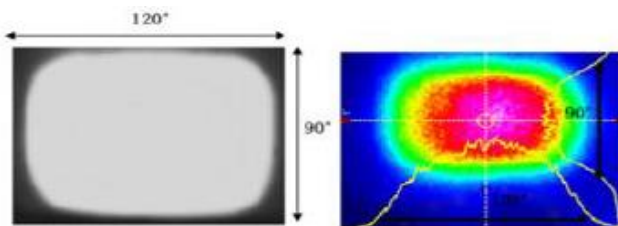

Outline Dimensions (unit: mm)

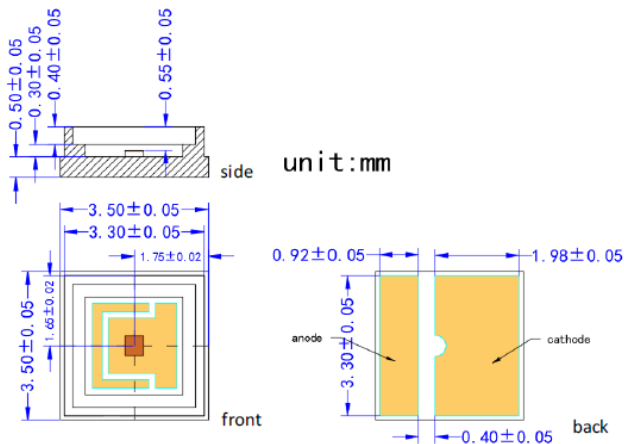

SMT Reflow Soldering Curve

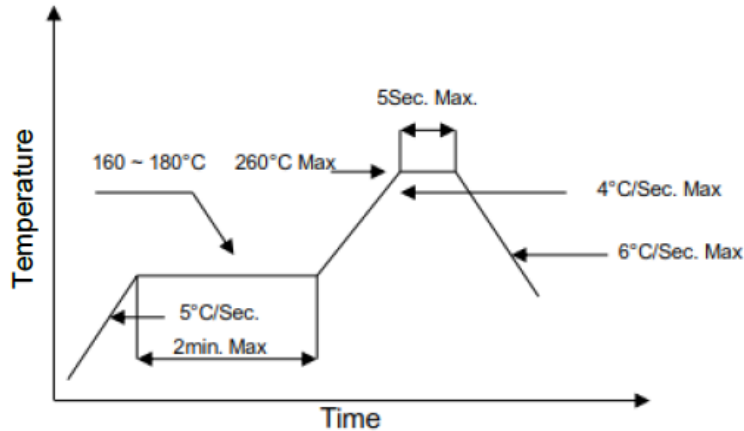

Note: Reflow soldering can be operated only one time. During the temperature ramp-up, no forces may be exerted on the LD which would deform or damage them. After soldering is completed, please do not process until the product temperature ramps down to room temperature.

Additional Notes

1. Please use solder paste to cure the laser diode.
2. Please make sure that the heat of VCSEL diode has been completely conducted to metal shell to avoid affecting the optical power output.
3. This VCSEL diode can be only used in constant voltage and current.
4. Please do not aim the laser at people or animals.
5. You may observe the laser spot through an image monitoring equipment.
6. Please do not touch VCSEL diode surface by naked hands or squeeze the sealant on VCSEL diode surface. It may cause wrong optical angle and distorted laser spot, and even damage the VCSEL diode.
7. Please use ceramic suction nozzle to absorb the VCSEL diode, so as to avoid VCSEL diode sticking to the nozzle.
8. Please add a 0.02s blowing action after locating the laser diode to aluminum substrate.
9. Specifications are subject to change without notice.



www.lasermate.com

Lasermate Group, Inc.

19608 Camino De Rosa

Walnut, CA 91789 USA

Tel: (909)718-0999

Fax: (909)718-0998

sales@lasermate.com

www.lasermate.com