



High Speed 850nm 10mW VCSEL with Ball Lens, TO-46 Package

VCT-A85A31-OH



Description

The Lasermate VCT-A85A31-OH is an 850nm wavelength, 10mW output power, CW operating mode, Vertical Cavity Surface Emitting Laser (VCSEL) diode in TO-46 package with ball lens designed for use in sensing and datacom applications.

Features

- 10mW High power VCSEL
- 1Gbps data rate operation
- 850nm wavelength range
- Built-in monitor PD with cathode common type
- Ball lens type TO-46 can package

Applications

- High speed Data communications
- Gigabit ethernet
- Fiber channel
- Sensing





Specifications

Absolute Maximum Ratings				
Parameters	Min.	Max.	Unit	Conditions
Storage Temperature	-40	100	°C	
Operating Temperature	0	70	°C	
Lead Solder Temperature		260	°C	10 seconds
Continuous Forward Current		30	mA	
Continuous Reverse Voltage		5	V	10uA


Electro-Optical Characteristics (T _a =25°C unless otherwise stated)						
Parameters	Symbol	Min.	Typ.	Max.	Unit	Conditions
Threshold Current	I _{th}		5		mA	CW
Slope Efficiency	η	0.2	0.4		W/A	I _f =20mA
Optical Output Power	P _o		10		mW	I _f =20mA
Peak Wavelength	λ _p	840	850	860	nm	I _f =20mA
Spectral Bandwidth (RMS)	Δλ			0.85	nm	I _f =20mA
Forward Voltage	V _f		2.0	2.3	V	I _f =20mA
Breakdown Voltage	V _b		-10		V	
Dynamic Resistance	R _d		20	30	Ohm	I _f =20mA
Monitor Current	I _m		0.1		mA	P _o =10mW
Dark Current	I _d			20	nA	P _o =0mW, V _R =3V
PD Reverse Voltage	BVR _{PD}	30	115		V	P _o =0mW, I _R =10uA
PD Capacitance	C			100	pF	V _R =0V, f=1MHz
				55		V _R =3V, f=1MHz

Thermal Characteristics						
Parameters	Symbol	Min.	Typ.	Max.	Unit	Conditions
I_{th} Temperature Variation	ΔI_{th}		2.5		mA	$T_a=0$ to 70°C
I_m Temperature Variation	$\Delta I_{PD}/\Delta T$		0.2		%/ $^\circ\text{C}$	$P_o=10\text{mW}$
η Temperature Coefficient	$\Delta\eta/\Delta T$		-0.5		%/ $^\circ\text{C}$	$T_a=0$ to 70°C , $I_f=20\text{mA}$
λ Temperature Coefficient	$\Delta\lambda/\Delta T$		0.06		nm/ $^\circ\text{C}$	$T_a=0$ to 70°C , $I_f=20\text{mA}$

Typical Characteristics

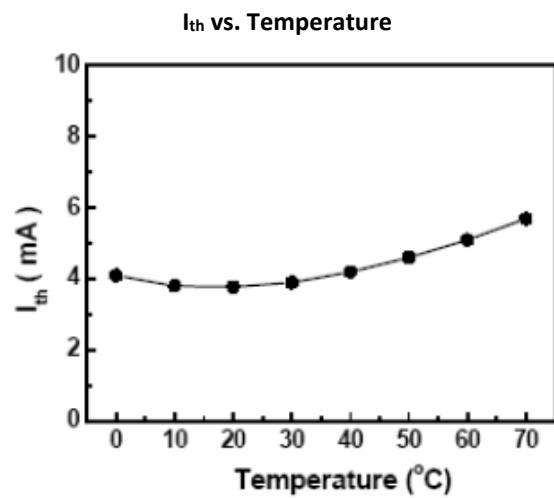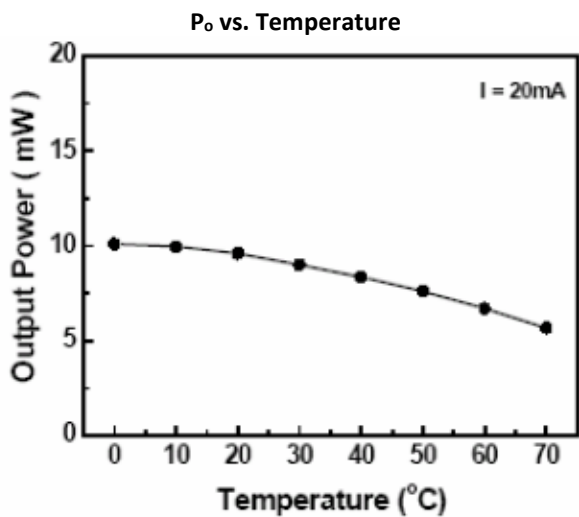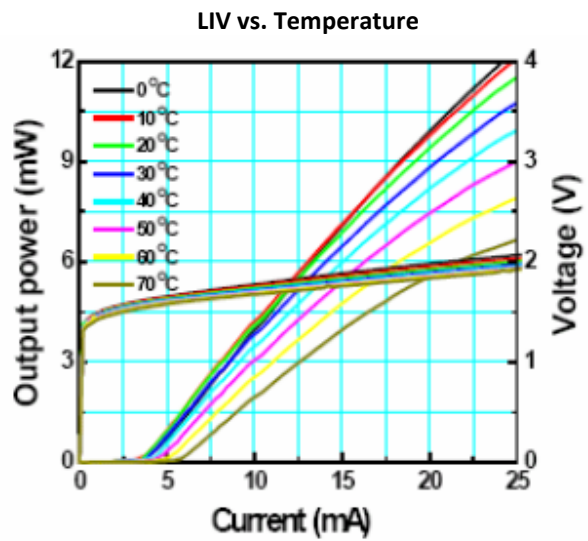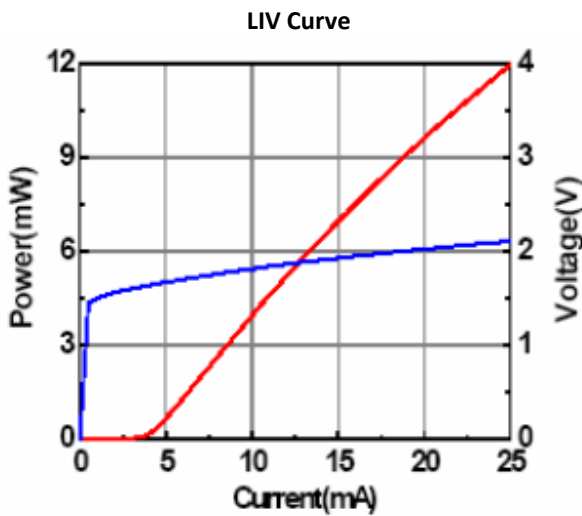

Outline Dimensions (unit: mm)

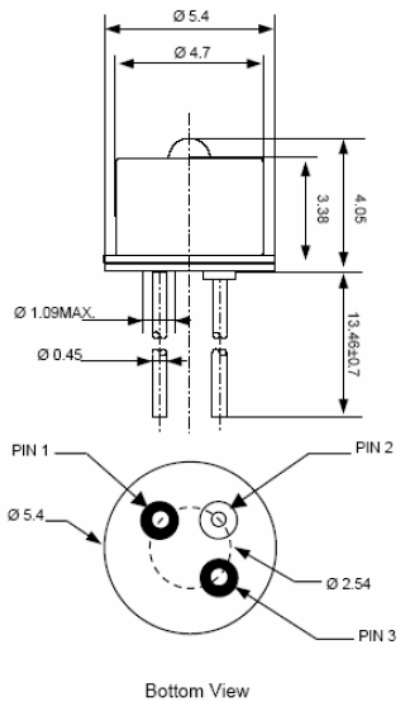

Pin Configuration

Pin Number	Function
1	LD Anode
2	LD Cathode/PD Anode, Case
3	PD Cathode

Additional Notes

- The inherent design of this component causes it to be sensitive to electrostatic discharge (ESD). To prevent ESD-induced damage and/or degradation to equipment, take normal ESD precautions when handling this product.
- Specifications are subject to change without notice.



Lasermate Group, Inc.
 19608 Camino De Rosa
 Walnut, CA 91789 USA
 Tel: (909)718-0999
 Fax: (909)718-0998
sales@lasermate.com
www.lasermate.com