




940nm 100W Pulsed VCSEL Diode

VCx-940P100WA



Description

The Lasermate VCx-940P100WA is an 940nm wavelength, 100W output power, pulsed operating mode, Vertical Cavity Surface Emitting Laser (VCSEL) diode. Available in different package types, the VCSEL is characterized by its single wavelength, short rise time, and high reliability. VCx-940P100WA is designed for use in 3D sensor, gesture recognition, IR illumination, medical application, broadband access network.

Features

- 940nm VCSEL Diode
- Output power: 100W (ns pulse)
- Single wavelength
- Good thermal conduction
- Oxide isolation technology
- Short rise time
- High reliability
- Easy to collimate

Applications

- 3D sensor
- Scanning lidar
- Laser curtain
- Range finder sensor
- 3D detection
- Proximity sensor

Product Overview

The following table lists the available part numbers, as well as the package type of each of the part numbers.

| Part Number | Package |
|-----------------|-------------------------------|
| VC35A-940P100WA | 3535 Package, Substrate AlN |
| VCT5-940P100WA | TO-56 Package, Substrate NiFe |

Specifications

| Absolute Maximum Ratings | | | | | |
|---------------------------------|--------|-----------------|------|---------------------|--|
| Parameters | Symbol | Rating | Unit | Conditions | |
| Case Operating Temperature | Top | -40 to 85 | °C | | |
| Storage Temperature | Tstg | -40 to 105 | °C | | |
| Reflow Soldering Temperature | Tsol | 260°C | °C | 10 seconds | |
| Reverse Voltage | Vr | | V | | |
| Maximum Continuous Current | Imax | | A | Duty cycle 0.1% max | |
| ESD Exposure (Human Body) Model | ESD | 2k-4k (Class B) | V | | |


Notes:

- Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or other conditions above those indicated in the operations section for expanded periods of time may affect reliability.
- In its maximum rating diode laser operation could damage its performance or cause potential safety hazard such as equipment failure.
- Electrostatic discharge is the main reason for laser fault of the diode. Take effective precautions against ESD. When dealing with laser diodes, use wrist strap, grounding work surface and strict antistatic technology.


| Electro-Optical Characteristics (T _{op} =25°C, Pulse width 6.8ns at 11.68 kHz) | | | | | | | |
|---|----------------------|------|---------|------|-------|----------------------|---------------------|
| Parameters | Symbol | Min. | Typ. | Max. | Unit | Conditions | |
| Optical Output Power | P _o | 90 | 100 | - | W | I _F =90A | |
| Threshold Current | I _{th} | - | 0.1 | - | A | | |
| Forward Pulse Current | | - | 90 | - | A | | |
| Slope Efficiency | η | - | 1.1 | - | W/A | | |
| Emission Area | | - | 378x374 | - | um | | |
| Peak Wavelength | λ _p | 930 | 940 | 950 | nm | P _o =100W | |
| Pulse Forward Voltage | V _F | - | 28 | 29 | V | I _F =90A | |
| Series Resistance | R _s | - | 0.3 | - | Ohm | I _F =90A | |
| Beam Angle | (1/e ²) | θ | - | 25 | - | Deg | I _F =90A |
| | FWHM | θ | - | 20 | - | Deg | I _F =90A |
| Wavelength Temperature Drift | Δλ _p / ΔT | - | 0.07 | - | nm/°C | I _F =90A | |
| Soldering Temperature | Tsol | | | 260 | °C | 10 seconds | |

Typical Characteristics

LIV Graph

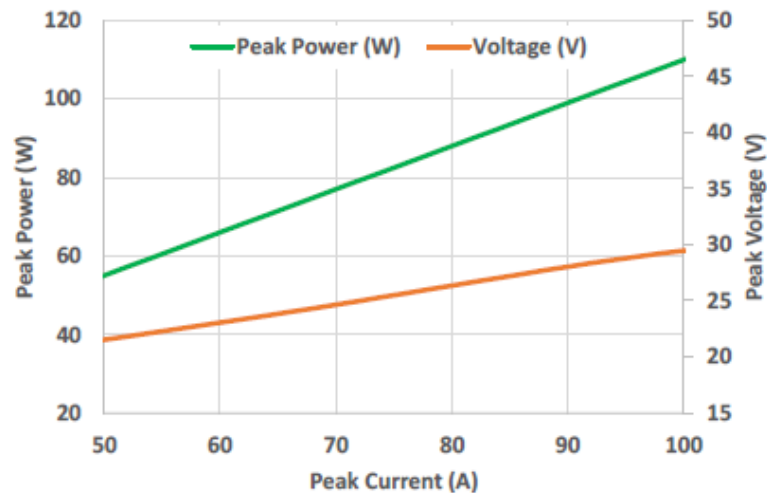


Intensity vs. Wavelength

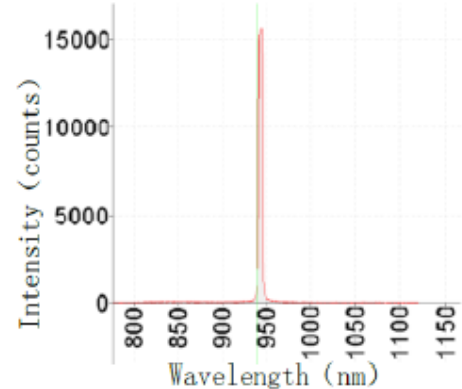


Outline Dimensions (unit: mm)


VC35A-940P100WA (3535 SMD Package, Substrate AlN)

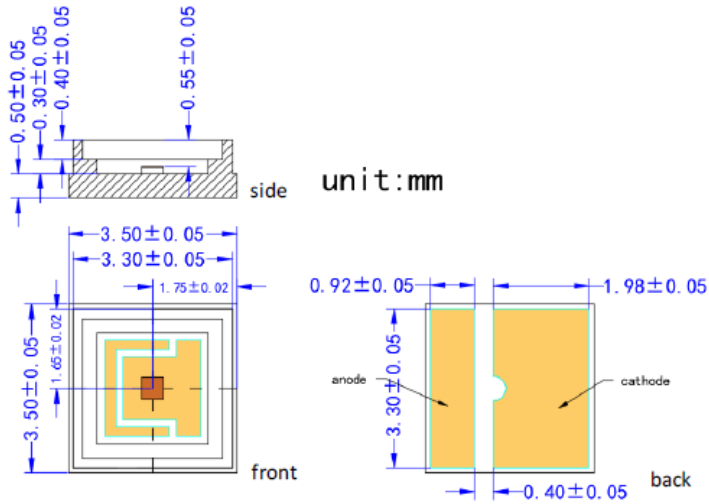

VCT5-940P100WA (TO-56 Package, Substrate NiFe)

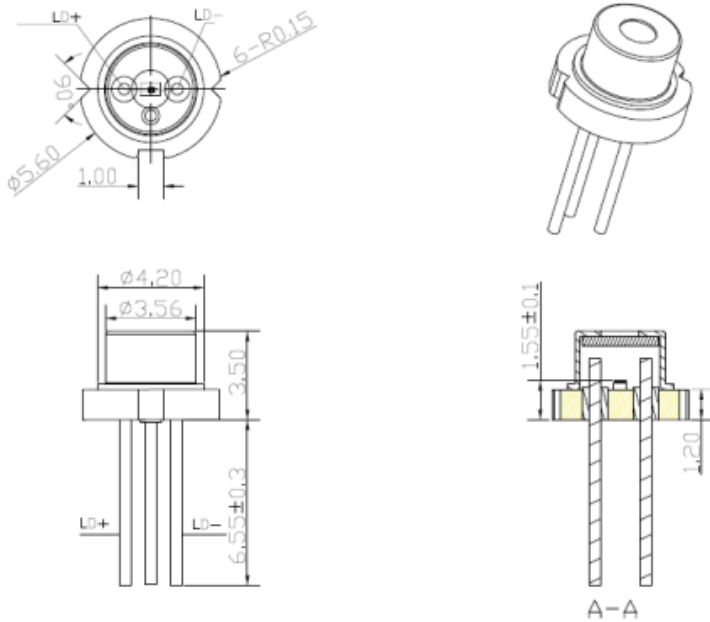

SMT Reflow Soldering Curve

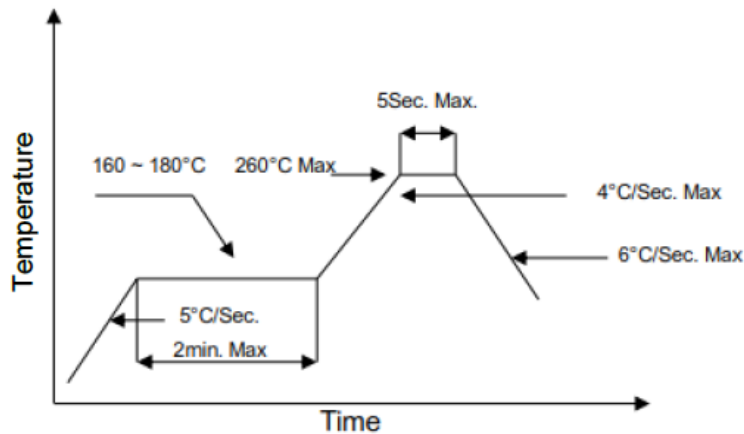

Note: Reflow soldering can be operated only one time. During the temperature ramp-up, no forces may be exerted on the LD which would deform or damage them. After soldering is completed, please do not process until the product temperature ramps down to room temperature.

Additional Notes

1. Please use solder paste to cure the laser diode.
2. Please make sure that the heat of VCSEL diode has been completely conducted to metal shell to avoid affecting the optical power output.
3. This VCSEL diode can be only used in constant voltage and current.
4. Please do not aim the laser at people or animals.
5. You may observe the laser spot through an image monitoring equipment.
6. Please do not touch VCSEL diode surface by naked hands or squeeze the sealant on VCSEL diode surface. It may cause wrong optical angle and distorted laser spot, and even damage the VCSEL diode.
7. Please use ceramic suction nozzle to absorb the VCSEL diode, so as to avoid VCSEL diode sticking to the nozzle.
8. Please add a 0.02s blowing action after locating the laser diode to aluminum substrate.
9. Specifications are subject to change without notice.



Lasermate Group, Inc.
 19608 Camino De Rosa
 Walnut, CA 91789 USA
 Tel: (909)718-0999
 Fax: (909)718-0998
sales@lasermate.com
www.lasermate.com