



APCT-42x Driver Circuit Boards



Specifications

- APC with modulator for TTL modulation
- Maximum power 150mW
- Frequency up to 100KHz
- Output power adjustable
- Input voltage 3.3 V DC for Input current <100mA
- Input voltage 5 V DC for Input current <50mA
- Output power constant
- Size: 11mm x 10mm

Connection of PCB to Laser Diode

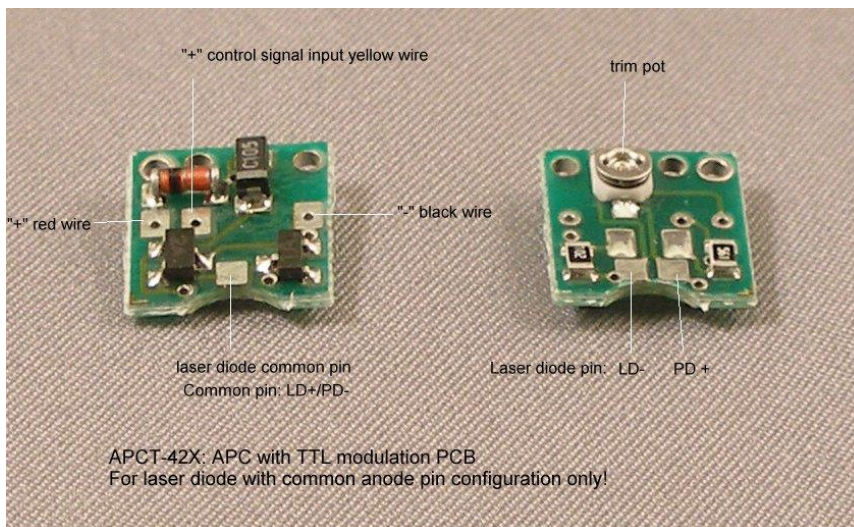

Product Overview

Part Number	Description
APCT-421	For laser diode with monitor current in the range of 10-100uA
APCT-422	For laser diode with monitor current in the range of 100-200uA
APCT-423	For laser diode with monitor current in the range of 200-300uA
APCT-424	For laser diode with monitor current in the range of 300-400uA
APCT-425	For laser diode with monitor current in the range of 400-500uA

Note: The specifications are subject to change without notice.



Lasermate Group, Inc.
19608 Camino De Rosa
Walnut, CA 91789 USA
Tel: (909)718-0999
Fax: (909)718-0998
sales@lasermate.com
www.lasermate.com