




# VCPD35A-850H2Wx

## 850nm 2000mW VCSEL with Photodiode and Diffuser

Data Sheet



### Description

The Lasermate VCPD35A-850H2Wx is a high-efficiency Vertical Cavity Surface Emitting Laser (VCSEL) diode operating in pulsed mode at 850nm with an integrated photodiode for optical feedback. Housed in a 3535 surface-mount (SMD) package and featuring an integrated diffuser, it provides uniform beam distribution, low threshold current, and excellent reliability. This VCSEL is optimized for sensing, imaging, and proximity detection applications requiring high pulse energy and optical monitoring.

### Features

- 3535 surface-mount SMD package
- Integrated photodiode for feedback monitoring
- Integrated diffuser
- 2W pulsed output @ 2.04A
- Low wavelength drift
- Oxide isolation technology
- Low threshold current
- High reliability and easy to collimate

### Applications

- 3D sensing systems
- Lidar and range finding
- IR illumination
- Medical imaging and diagnostics
- Proximity detection

### Ordering Information

Part Number	Description
VCPD35A-850H2WA	850nm 2000mW VCSEL with Photodiode and 60°x45° Diffuser
VCPD35A-850H2WB	850nm 2000mW VCSEL with Photodiode and 72°x58° Diffuser
VCPD35A-850H2WC	850nm 2000mW VCSEL with Photodiode and 90°x70° Diffuser
VCPD35A-850H2WD	850nm 2000mW VCSEL with Photodiode and 110°x85° Diffuser
VCPD35A-850H2WE	850nm 2000mW VCSEL with Photodiode and 120°x90° Diffuser

## Specifications

Absolute Maximum Ratings				
Parameters	Symbol	Rating	Unit	Conditions
Case Operating Temperature	Top	-40 to 85	°C	
Storage Temperature	Tstg	-40 to 105	°C	
Reflow Soldering Temperature	Tsol	260	°C	10 seconds
Reverse Voltage	Vr	5	V	
Maximum Continuous Current	I <sub>max</sub>	3	A	
ESD Exposure (Human Body) Model	ESD	2K	V	

### Notes:

- Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or other conditions above those indicated in the operations section for expanded periods of time may affect reliability.
- In its maximum rating diode laser operation could damage its performance or cause potential safety hazard such as equipment failure.
- Electrostatic discharge is the main reason for laser fault of the diode. Take effective precautions against ESD. When dealing with laser diodes, use wrist strap, grounding work surface and strict antistatic technology.

Electro-Optical Characteristics (T <sub>op</sub> =25°C, 10% Duty cycle)						
Parameters	Symbol	Min.	Typ.	Max.	Unit	Conditions
Optical Output Power	P <sub>o</sub>	-	2	-	W	I <sub>F</sub> =2.04A
Threshold Current	I <sub>th</sub>	-	0.25	-	A	
Forward Current	I <sub>F</sub>	-	2.04	-	A	
Power Conversion Efficiency	η	-	41	-	%	I <sub>F</sub> =2.04A
Slope Efficiency	SE	-	1.04	-	W/A	P <sub>o</sub> =2.0W
Peak Wavelength	λ <sub>P</sub>	840	850	860	nm	I <sub>F</sub> =2.04A
Forward Voltage	V <sub>f</sub>	-	2.38	-	V	I <sub>F</sub> =2.04A
Series Resistance	R	-	0.33	-	Ohm	I <sub>F</sub> =2.04A
Original Beam Angle	Θ	-	24	-	Deg	I <sub>F</sub> =2.04A
Wavelength Temperature Drift	Δλ <sub>P</sub> / ΔT	-	0.07	-	nm/°C	I <sub>F</sub> =2.04A
Emission Area		-	702 x 524	-	um	
Rise/Fall Time		-	1	-	ns	
Soldering Temperature	Tsol			260	°C	10 seconds
Substrate					AlN	


Note: Electro-optical characteristic with a package or diffuser would require further evaluation. Values are based on limited sample size and estimated values.

Photodiode Specifications			
Range	Filter	Substrate	Responsivity
400-1100nm	No	Si	0.97 @ 850nm




### Typical Characteristics


LIV Graph

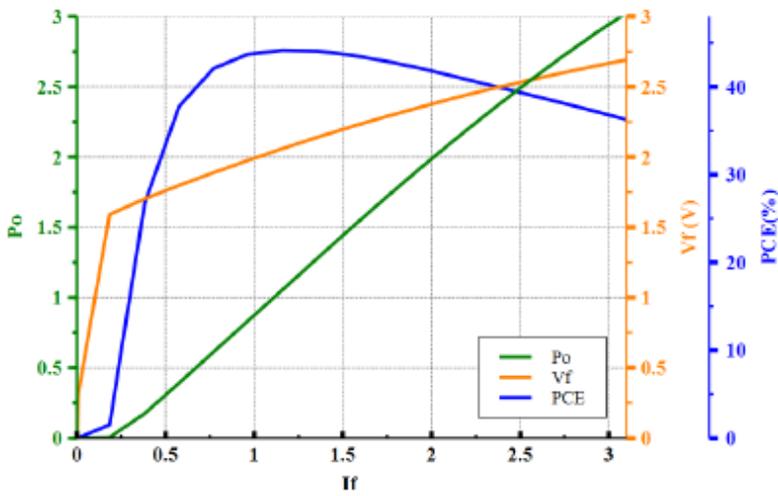

Intensity vs. Wavelength

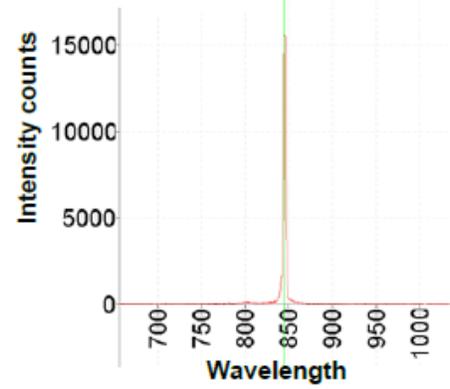


Photodiode Responsivity Chart

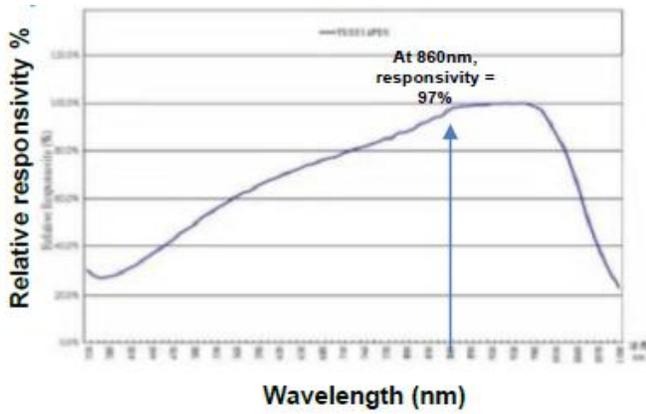


**Typical Laser Spot and Beam Profile**


Beam angle: 60°x45°

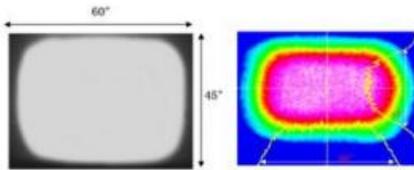


Beam angle: 72°x58°

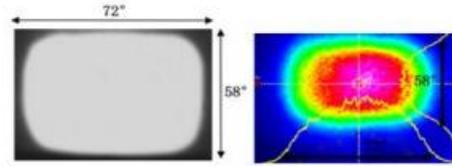


Beam angle: 90°x70°

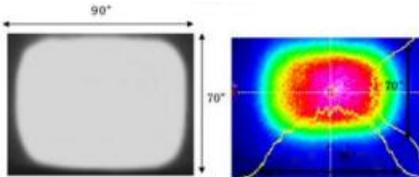




Beam angle: 110°x85°

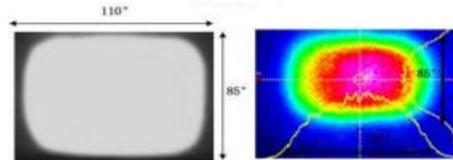


Beam angle: 120°x90°

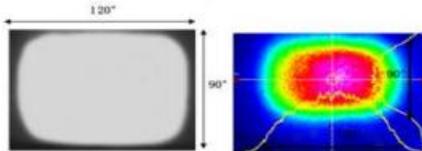

**Outline Dimensions (unit: mm)**

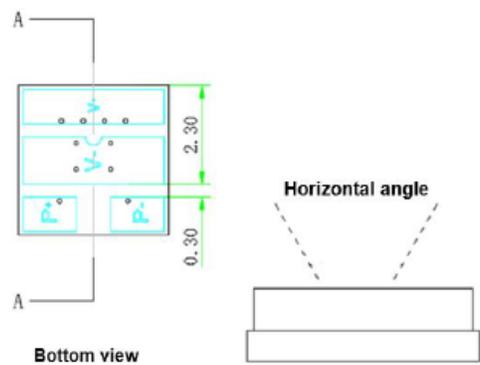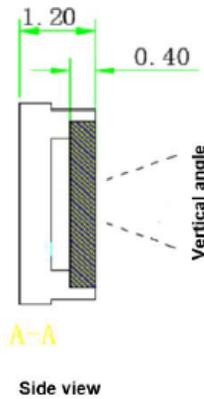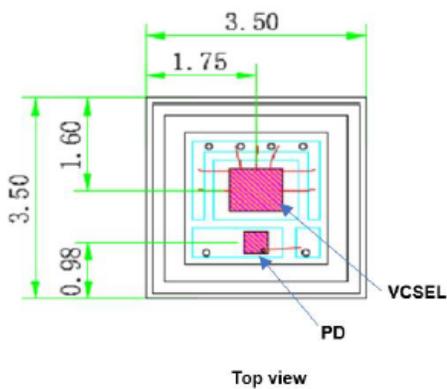

### SMT Reflow Soldering Curve

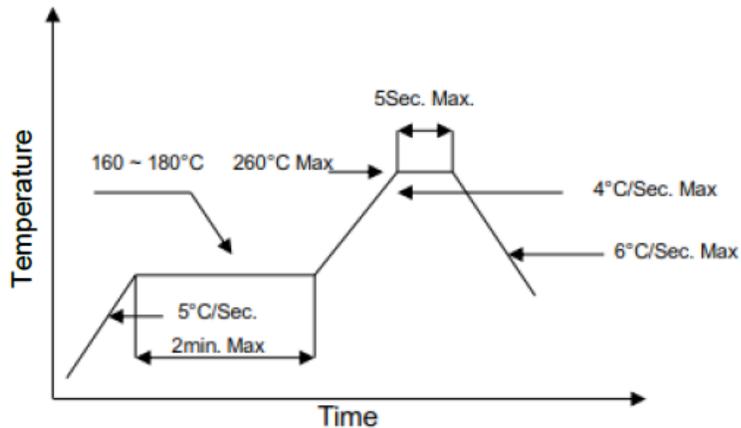

Note: Reflow soldering can be operated only one time. During the temperature ramp-up, no forces may be exerted on the LD which would deform or damage them. After soldering is completed, please do not process until the product temperature ramps down to room temperature.

### Additional Notes

1. Please use solder paste to cure the laser diode.
2. Please make sure that the heat of VCSEL diode has been completely conducted to metal shell to avoid affecting the optical power output.
3. This VCSEL diode can be only used in constant voltage and current.
4. Please do not aim the laser at people or animals.
5. You may observe the laser spot through an image monitoring equipment.
6. Please do not touch VCSEL diode surface by naked hands or squeeze the sealant on VCSEL diode surface. It may cause wrong optical angle and distorted laser spot, and even damage the VCSEL diode.
7. Please use ceramic suction nozzle to absorb the VCSEL diode, so as to avoid VCSEL diode sticking to the nozzle.
8. Please add a 0.02s blowing action after locating the laser diode to aluminum substrate.
9. Specifications are subject to change without notice.