



808nm 1000mW 50°C Laser Diode in ø9.0mm TO-Can Package

LD808x1WD15



Description

The Lasermate LD808x1WD15 is an 808nm, 1000mW laser diode in a ø9.0mm, TO-can package and with operating temperature of 50°C. The laser diode is suitable as compact light source for many applications.

Features

- 808nm Infrared laser diode
- Optical output power: 1000mW CW
- Operating temperature: +50°C
- High reliability
- Low operating current
- Low divergence angle
- Package: TO-9, ø9.0mm

Applications

- Motion sensor
- Medical application
- Pumping source for solid state laser
- Infrared illumination
- Industrial application

Absolute Maximum Ratings (T_c = 25 °C)





Parameter	Symbol	Rating	Unit
Optical output power	P _O	1100	mW
Reverse voltage (LD)	V _{RL}	2	V
Operating temperature	T _{opr}	-10 to +50	°C
Storage temperature	T _{stg}	-10 to +85	°C




Electrical and Optical Characteristics (T_c = 25 °C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Lasing wavelength	λ	803	808	813	nm	P _O = 1W
Threshold current	I _{th}	-	220	-	mA	P _O = 1W
Operating current	I _{op}	-	1200	1500	mA	P _O = 1W
Operating voltage	V _{op}	-	2.0	2.2	V	P _O = 1W
Slope efficiency	η	0.95	1.1	-	mW/mA	P _O = 250-750mW
Parallel divergence angle	Θ _{//}	-	8	-	deg	P _O = 1W
Perpendicular divergence angle	Θ _⊥	-	28	-	deg	P _O = 1W
Monitor current	I _m	-	0.9	-	mA	P _O = 1W


* Θ_{//} and Θ_⊥ are defined as the angle within which the intensity is 50% of the peak value.

Typical Characteristics

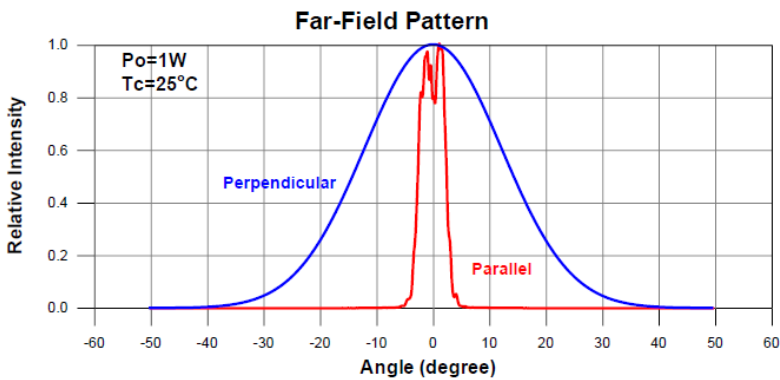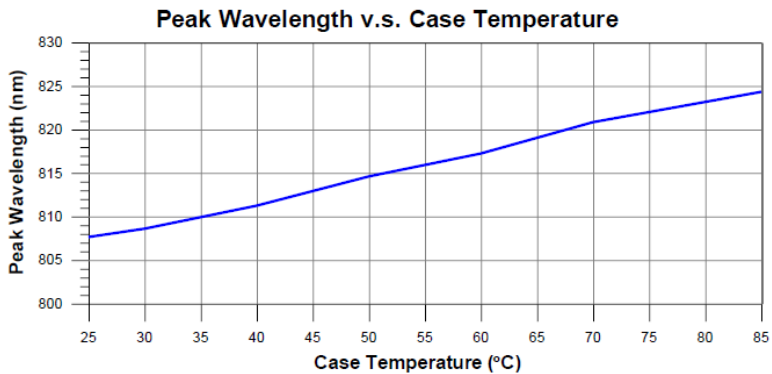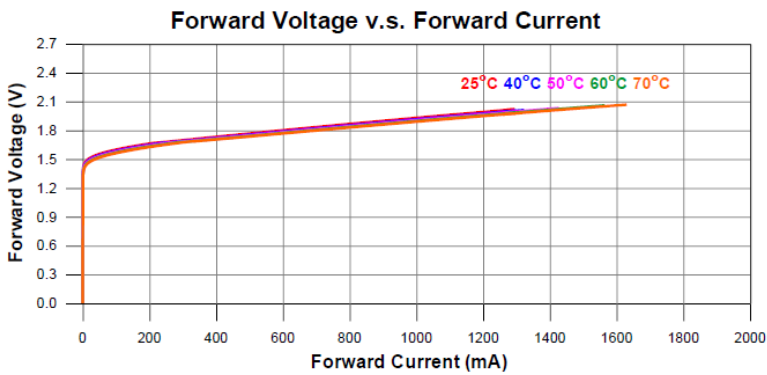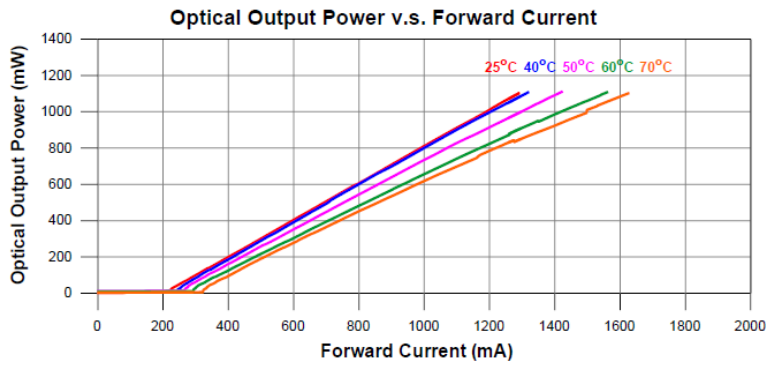

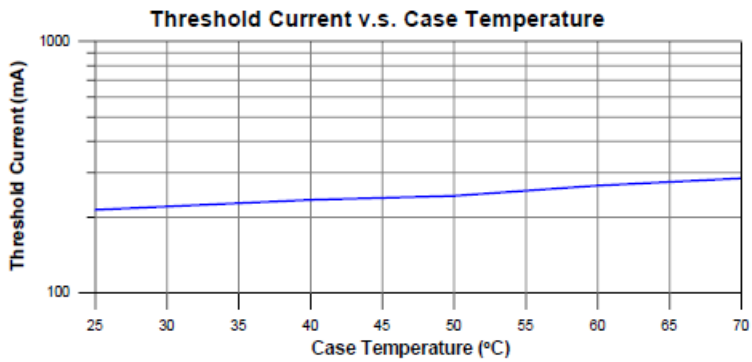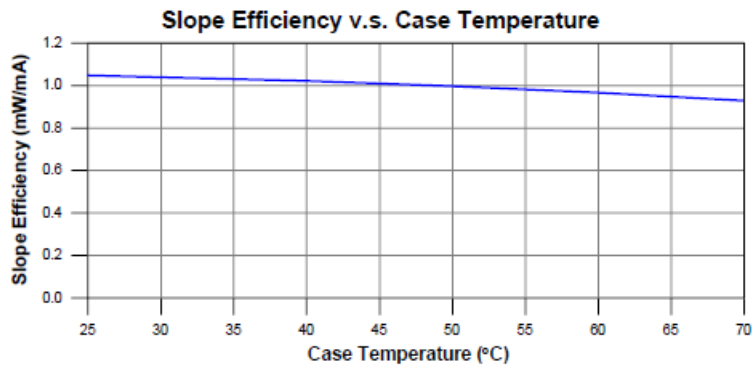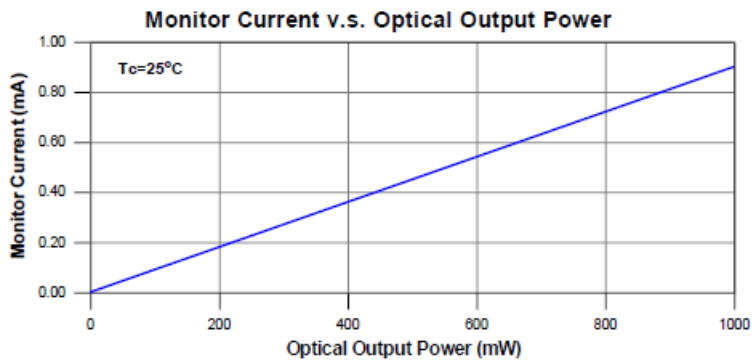

Mechanical Outline (unit: mm)

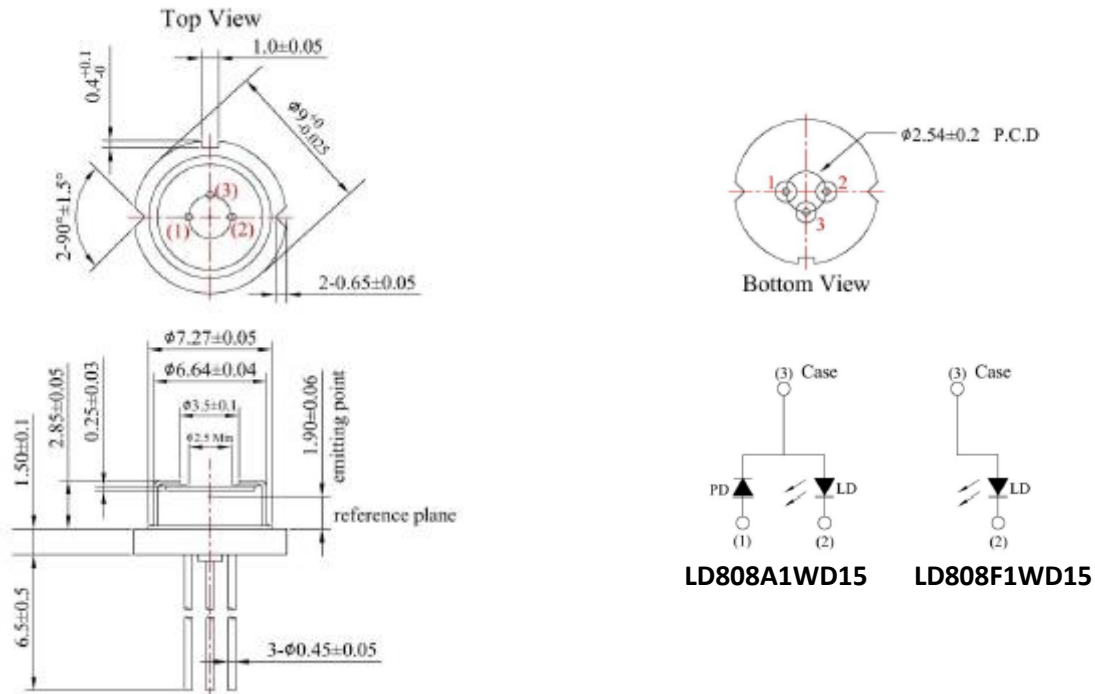

Additional Notes

- Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- Observing visible or invisible laser beams with human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- No laser device should be used in any application or situation where life or property is at risk in the event of device failure.
- Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.



Lasermate Group, Inc.
 19608 Camino De Rosa
 Walnut, CA 91789 USA
 Tel: (909)718-0999
 Fax: (909)718-0998
sales@lasermate.com
www.lasermate.com