



LD520A30C16

520nm 30mW 60°C CW Laser Diode in TO-18 ø5.6mm Package

Description

The Lasermate LD520A30C16 is a 520nm, 30mW CW laser diode in a ø5.6mm, TO-can package and with high operating temperature of 60°C. The laser diode is suitable for many applications, including OA equipment, audio visual equipment, home appliance, telecommunication equipment, measuring equipment, tooling machines, and computers.

Features

- 520nm InAlGaIn MQW Green Laser Diode
- Optical output power: 30mW CW
- High temperature operation: 60°C
- TE oscillating transverse mode
- Package: ø5.6mm, TO-18

Applications

- OA equipment & Audio visual equipment
- Home appliance
- Telecommunication equipment (Terminal)
- Measuring equipment
- Tooling machines
- Computers

Absolute Maximum Ratings ($T_C = 25\text{ }^\circ\text{C}$ ⁽¹⁾)

PARAMETER	SYMBOL	CONDITION	RATING	UNIT
Optical output power	P_o	CW	35	mW
Reverse voltage (LD)	V_{RL}	-	2	V
Reverse voltage (PD)	V_{RD}	-	30	V
Operating temperature (Case temperature)	$T_{op(c)}$	CW	-10 to +60	°C
Storage temperature	T_{stg}	-	-40 to +85	°C
Soldering temperature ⁽²⁾	T_{sld}	-	350	°C

Notes:


1. T_C : Case temperature (T_C measurement point is referenced to P3 drawing).
2. Soldering temperature means soldering iron tip temperature while soldering. Soldering position is 1.6mm apart from bottom edge of the case (Immersion time: ≤3s).

Electrical and Optical Characteristics ($T_C = 25\text{ }^\circ\text{C}$, CW unless otherwise noted)


PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS
Threshold current	I_{th}	-	25	45	mA	
Operating current	I_{op}	-	70	90	mA	$P_o = 30\text{mW}$
Operating voltage	V_{op}	-	6.5	7	V	$P_o = 30\text{mW}$
Wavelength	λ_p	515	520	530	nm	$P_o = 30\text{mW}$
Half Intensity Angle (Parallel)	$\Theta_{//}$	5	7	9	deg	$P_o = 30\text{mW}$
Half Intensity Angle (Perpendicular)	Θ_{\perp}	19	22	25	deg	$P_o = 30\text{mW}$
Ripple	RI2	-	-	30	%	$P_o = 30\text{mW}$
Misalignment angle (Parallel)	$\Delta \Theta_{//}$	-3	0	+3	deg	$P_o = 30\text{mW}$
Misalignment angle (Perpendicular)	$\Delta \Theta_{\perp}$	-3	0	+3	deg	$P_o = 30\text{mW}$
Differential Efficiency	η_d	0.45	0.65	-	mW/mA	$\frac{20\text{mW}}{I(30\text{mW}) - I(10\text{mW})}$
Kink	K-LI	-10	-	10	%	$P_1=7\text{mW}, P_2=21\text{mW}, P_3=35\text{mW}$
Monitor current	I_m	0.05	0.3	0.55	mA	$P_o = 30\text{mW}, V_{rd}=5\text{V}$

Mechanical Outline (unit: mm)

General Tolerances $\pm 0.2\text{mm}$

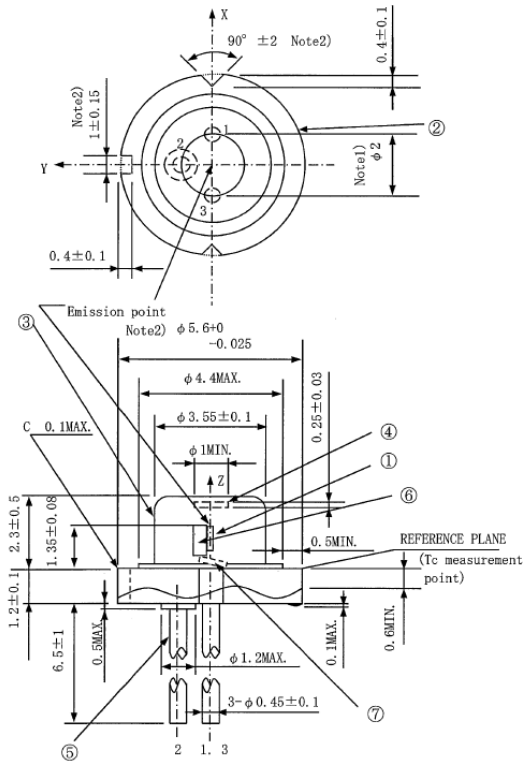

PIN CONFIGURATION



NOTES:

1. Dimension of the bottom of leads.
2. These dimensions are valid only in the range of 0~0.6mm below from the reference plane.

Additional Notes

- Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- Observing visible or invisible laser beams with human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- No laser device should be used in any application or situation where life or property is at risk in the event of device failure.
- Specifications are subject to change without notice. Ensure that you have the latest specifications by contacting us prior to purchase or use of the product.