



## LD635A30C14

635nm 30mW 40°C CW Laser Diode in  $\varnothing$ 5.6mm TO-18 Can Package

## Description

The Lasermate LD635A30C14 is a 635nm, 30mW laser diode in a  $\varnothing$ 5.6mm, TO-can package and with operating temperature of 40°C. The laser diode is suitable for many applications, including industrial laser markers, high visibility LD display, lighting show, and survey and engineering instruments.

## Features

- 635nm AlGaInP Visible Laser Diode
- Optical output power: 30mW CW
- Operating temperature: +40°C
- High visibility
- High ESD level
- Package: TO-18,  $\varnothing$ 5.6mm

## Applications

- Industrial laser markers
- Survey and engineering instruments
- High visibility LD display
- Lighting show







## Specifications

ABSOLUTE MAXIMUM RATINGS				
PARAMETER	SYMBOL	CONDITION	RATING	UNIT
Light output power	$P_O$	CW	35	mW
Reverse voltage (LD)	$V_{RL}$	-	2	V
Reverse voltage (PD)	$V_{RD}$	-	30	V
Forward current (PD)	$I_{FD}$	-	10	mA
Case temperature	$T_C$	-	-10 to +40	°C
Storage temperature	$T_S$	-	-40 to +85	°C



ELECTRICAL AND OPTICAL CHARACTERISTICS (TC = 25 °C)						
PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS
Peak wavelength	$\lambda$	630	640	645	nm	$P_O = 30\text{mW}$
Threshold current	$I_{th}$	-	50	70	mA	
Operating current	$I_{op}$	-	100	120	mA	$P_O = 30\text{mW}$
Operating voltage	$V_{op}$	-	2.3	2.7	V	$P_O = 30\text{mW}$
Differential efficiency	$\eta$	0.3	0.6	1.2	mW/mA	$P_O = 25\text{-}30\text{mW}$
Monitor current	$I_m$	0.1	0.25	0.5	mA	$P_O = 30\text{mW}, V_{RD} = 5\text{V}$
Parallel divergence angle	$\theta_{//}$	5	8	12	deg	$P_O = 30\text{mW}$
Perpendicular divergence angle	$\theta_{\perp}$	25	33	38	deg	
Parallel FFP deviation angle	$\Delta \theta_{//}$	-3	0	+3	deg	
Perpendicular FFP deviation angle	$\Delta \theta_{\perp}$	-3	0	+3	deg	
Emission point accuracy	$\Delta x \Delta y \Delta z$	-80	0	+80	um	




Typical Characteristics

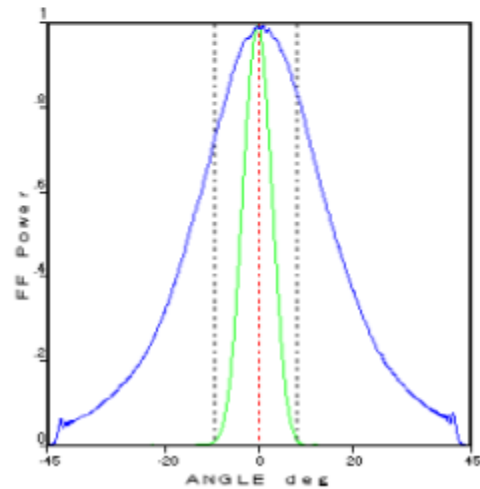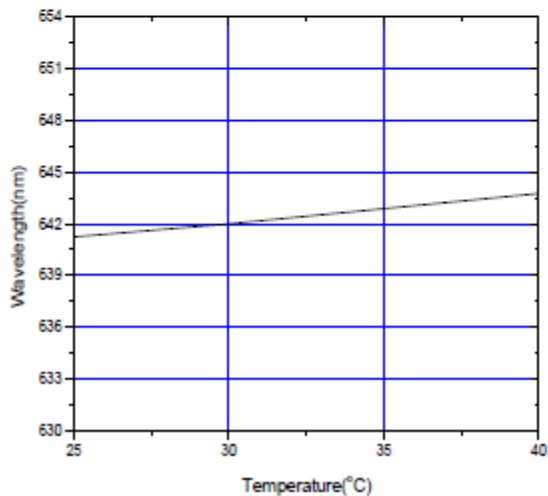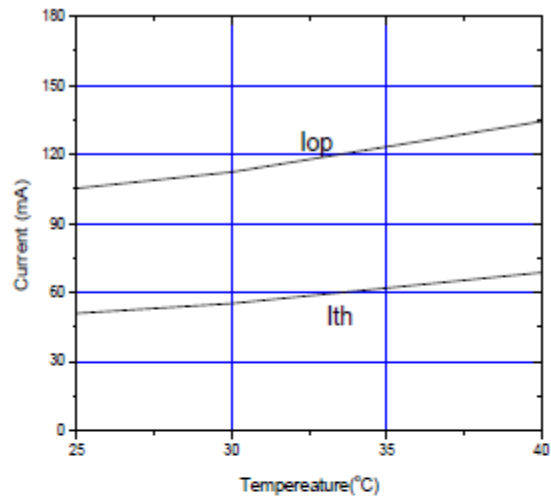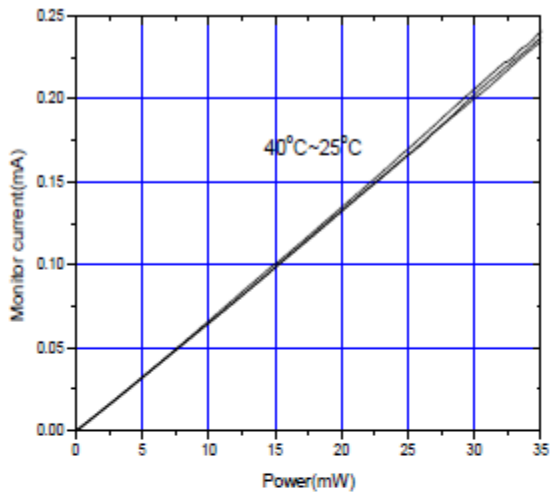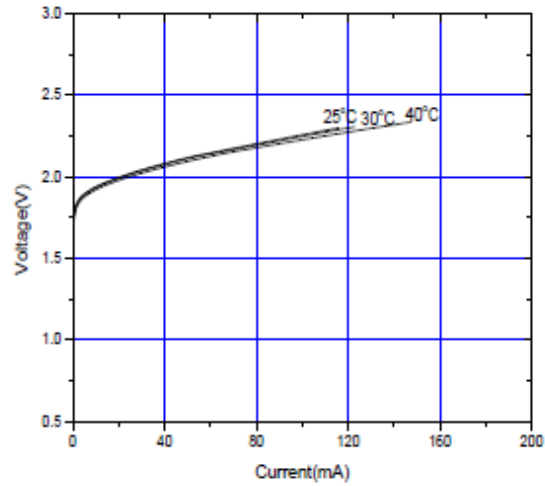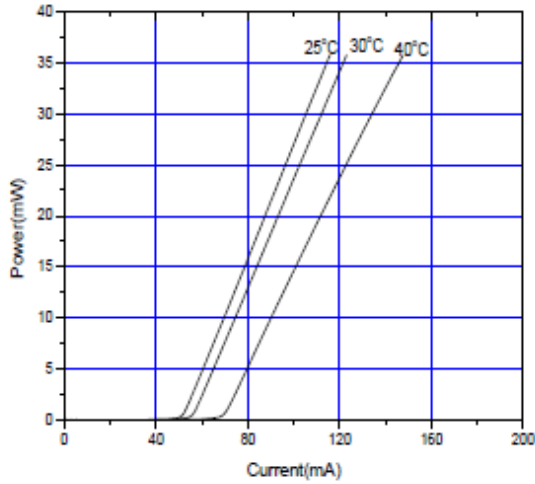

Mechanical Outline (unit: mm)

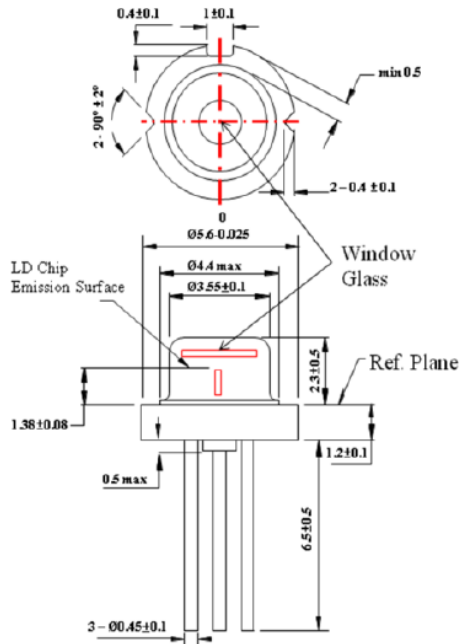

PIN CONFIGURATION



Additional Notes

- Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- Observing visible or invisible laser beams with human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- No laser device should be used in any application or situation where life or property is at risk in the event of device failure.
- Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.