



LD635D500G13

High Power 635nm 500mW FP Laser Diode in C-Mount Package

Description

The Lasermate LD635D500G13 is a high power 635nm, 500mW laser diode in C-mount package. The laser diode is suitable as a light source for many applications, including laser display, PDT, biochemistry, military, medical/life and health science, and illumination.

Features

- 635nm Fabry-Perot cavity semiconductor laser diode
- Optical output power: 500mW CW
- High power
- No monitor photodiode
- Package: C-mount

Applications

- Laser display
- PDT
- Biochemistry
- Military
- Medical/Life and health science
- Illumination

Specifications ($T_c = 20^\circ\text{C}$)

Optical Characteristics

PARAMETER	MIN.	TYP.	MAX.	UNIT
Lasing wavelength	625	635	645	nm
Output power	-	500	-	mW
Spectral width	-	1.0	2.0	nm
Emitting area width	-	150	-	um
Temperature coefficient	-	0.30	-	nm/ $^\circ\text{C}$
Fast axis divergence	-	34	38	deg
Slow axis divergence	-	7	10	deg

Electrical Characteristics

PARAMETER	MIN.	TYP.	MAX.	UNIT
Slope efficiency	0.90	-	-	W/A
Threshold current	-	0.60	0.80	A
Operating current	-	1.15	1.35	A
Operating voltage	-	2.10	2.30	V


Other Characteristics

PARAMETER	MIN.	TYP.	MAX.	UNIT
Package	C-mount			-
Operating temperature	10		30	$^\circ\text{C}$
Storage temperature	-10		+60	$^\circ\text{C}$




Typical Characteristics


P-I-V CURVE

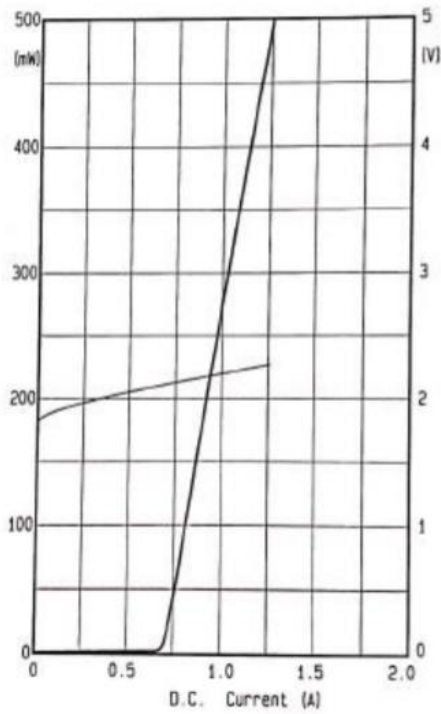

SPECTRAL CURVE

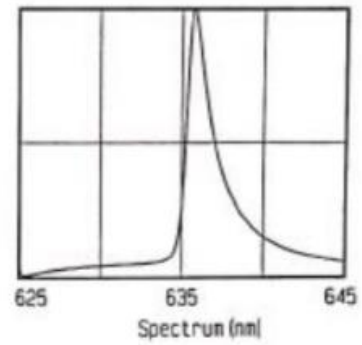

Mechanical Outline (unit: mm)

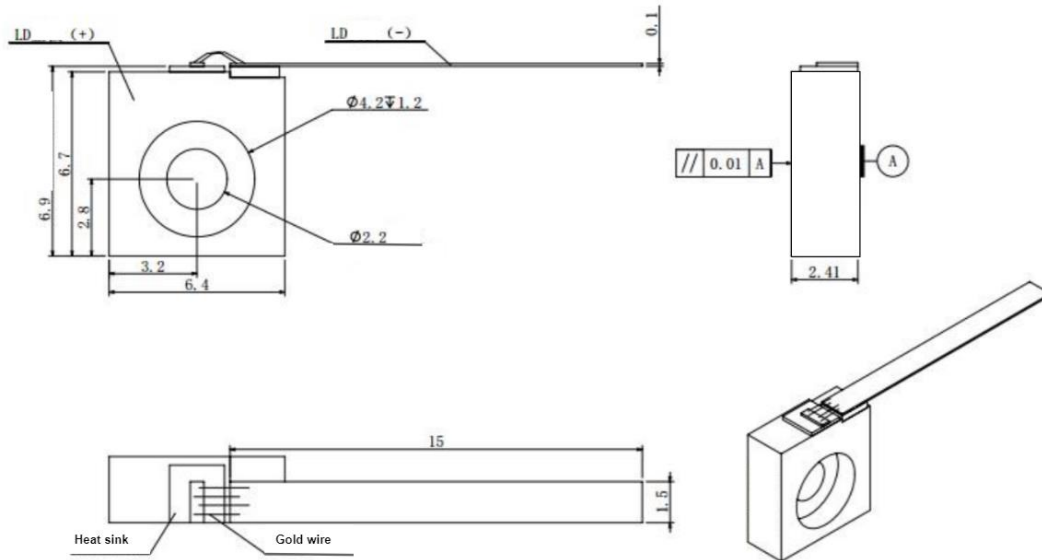

Additional Notes

- Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- Observing visible or invisible laser beams with human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- No laser device should be used in any application or situation where life or property is at risk in the event of device failure.
- Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.