



## LD650A7A18

### 650nm 7mW 85°C CW Laser Diode in ø3.3mm TO-Can Package

#### Description

The Lasermate LD650A7A18 is a 650nm, 7mW laser diode in a ø3.3mm, small TO-can package and with high operating temperature of 85°C. The laser diode is suitable as a light source for construction tools, high-definition laser display, and medical application.

#### Features

- 650nm Visible Laser Diode
- Optical output power: 7mW CW
- High temperature operation: +85°C
- Single transverse mode
- TE mode
- Package: ø3.3mm, TO-can

#### Applications

- Construction tools
- High-definition laser display
- Medical application







#### Specifications

ABSOLUTE MAXIMUM RATINGS				
PARAMETER	SYMBOL	CONDITION	RATING	UNIT
Light output power	$P_O$	CW	8	mW
Reverse voltage (LD)	$V_{RL}$	-	2	V
Reverse voltage (PD)	$V_{RD}$	-	30	V
Case temperature	$T_C$	-	-10 to +85	°C
Storage temperature	$T_S$	-	-40 to +85	°C


ELECTRICAL AND OPTICAL CHARACTERISTICS (TC = 25 °C)						
PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS
Peak wavelength	$\lambda$	648	655	660	nm	$P_O = 7mW$
Threshold current	$I_{th}$	-	20	28	mA	
Operating current	$I_{op}$	-	27	35	mA	$P_O = 7mW$
Operating voltage	$V_{op}$	-	2.2	2.5	V	$P_O = 7mW$
Differential efficiency	$\eta$	0.7	0.85	1.1	mW/mA	$P_O = 3-5mW$
Monitor current	$I_m$	0.1	0.2	0.3	mA	$P_O = 7mW, V_{RD} = 5V$
Parallel divergence angle	$\Theta_{//}$	6	9	12	deg	$P_O = 7mW$
Perpendicular divergence angle	$\Theta_{\perp}$	24	27	32	deg	
Parallel FFP deviation angle	$\Delta \Theta_{//}$	-3	-	+3	deg	
Perpendicular FFP deviation angle	$\Delta \Theta_{\perp}$	-3	-	+3	deg	
Emission point accuracy	$\Delta x \Delta y \Delta z$	-80	-	+80	um	



### Typical Characteristics

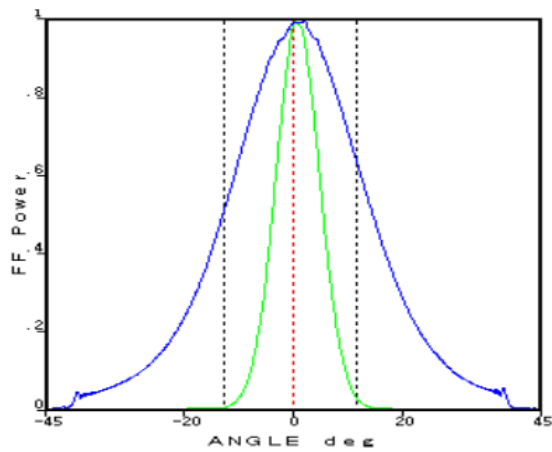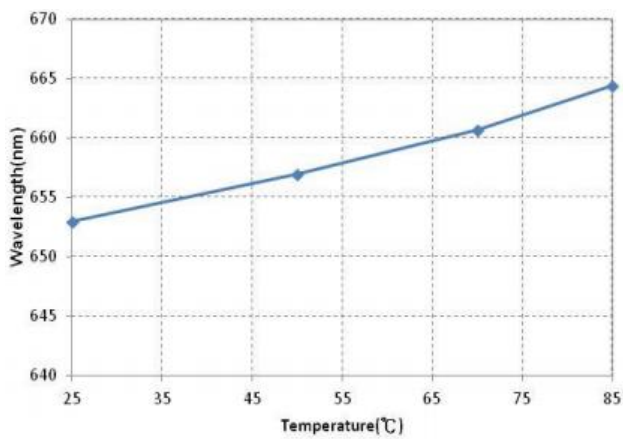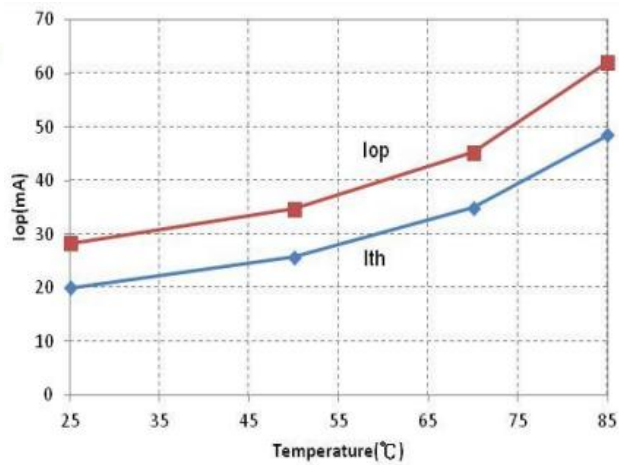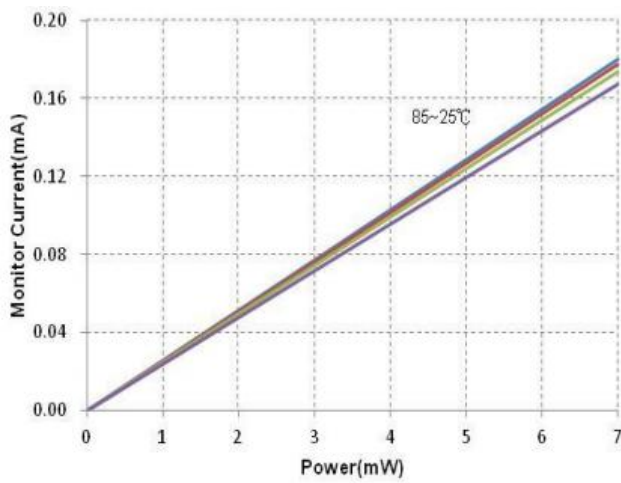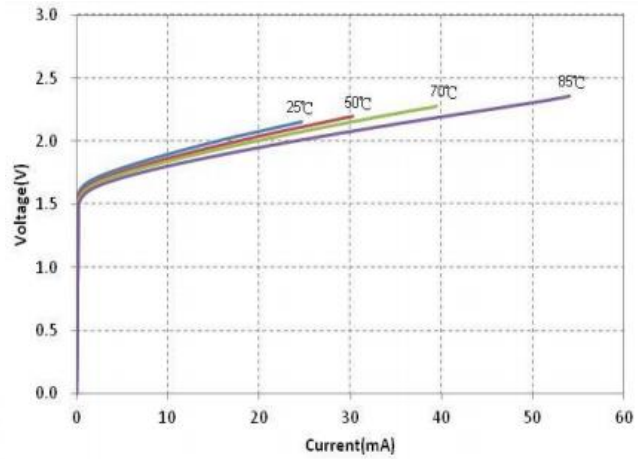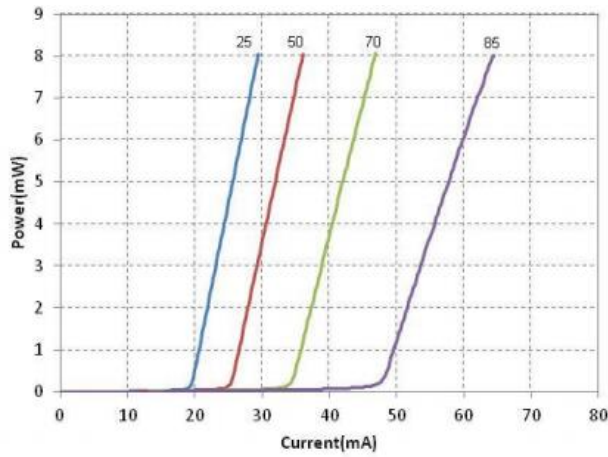

Mechanical Outline (unit: mm)

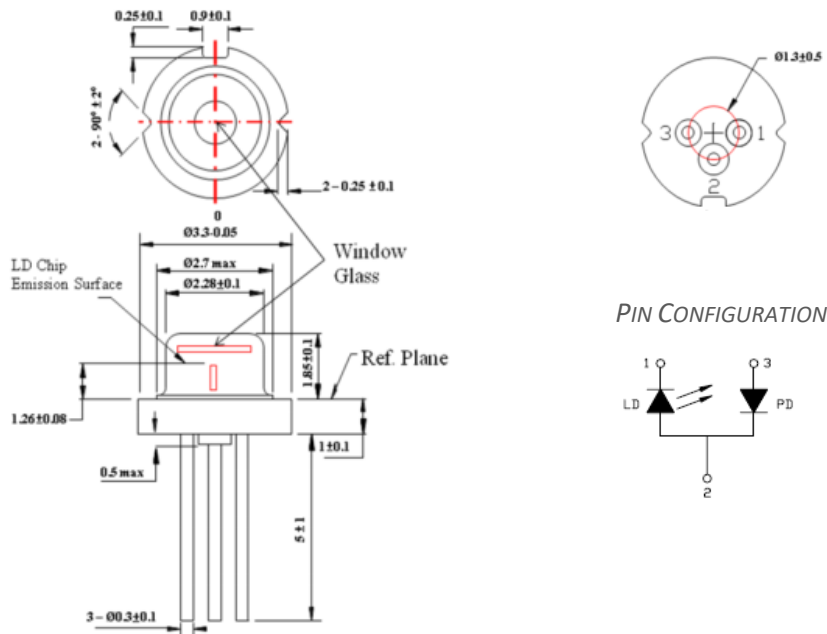

Additional Notes

- Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- Observing visible or invisible laser beams with human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser.
- No laser device should be used in any application or situation where life or property is at risk in the event of device failure.
- Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.