



LDV1064CxWI

1064nm CW Microchannel Water-Cooled Vertical Diode Laser Stack

Description

The LDV1064CxWI is an 1064nm wavelength, vertical stacked diode laser array providing 40W/bar CW and generating output powers up to 640W. The CW diode laser array employs micro-channels and enables water-cooling. The diode laser array is designed to provide the highest reliability and efficiency in pumping, industrial and medical applications.



Features

- 1064nm Micro-Channel Water-Cooled Vertical Stacked Array
- Containing up to 16 bars (Up to 40W CW/bar)
- High output power: Up to 640W
- Spectral width: <5 nm
- High reliability, High efficiency

Applications

- Pumping
- Industrial
- Medical

Product Overview

The following table lists the available part numbers, as well as the total output power, output power per bar, number of bars, and cooling method of each of the part numbers.


Part Number	Total Output Power	Output Power per Bar	Number of Bars	Cooling Method
LDV1064C200WI	200W	40W	5	Microchannel Water-Cooled
LDV1064C360WI	360W	40W	9	Microchannel Water-Cooled
LDV1064C640WI	640W	40W	16	Microchannel Water-Cooled



Specifications (T_c = 25°C)

Optical Characteristics					
Parameter	Symbol	Value			Unit
Center wavelength	λ_c	1064			nm
Operation mode		CW			-
Output power	P _o	200	360	640	W
Output power/bar	P _o /bar	40	40	40	W
Bar quantity		5	9	16	
Spectral width	$\Delta\lambda$	<5			nm
Bar space		1.8			mm
Fast axis divergence	θ_{\perp}	<39			deg
Slow axis divergence	θ_{\parallel}	<10			deg
Electrical Characteristics					
Parameter	Symbol	Value			Unit
Threshold current	I _{th}	<7			A
Operating current	I _{op}	<50			A
Operating voltage/bar	V _{op}	<2.0			V
Thermal Characteristics					
Parameter	Symbol	Value			Unit
Max. inlet pressure		65			psi
Cooling rate/bar		≥0.3			1/min
Cooling medium particle size		≤15			μm
Cooling medium conductivity		5 to 10			μs/cm
Operating temperature	T _{op}	15 to 35			°C
Storage temperature	T _{stg}	-10 to +60			°C

Mechanical Outline (unit: mm)

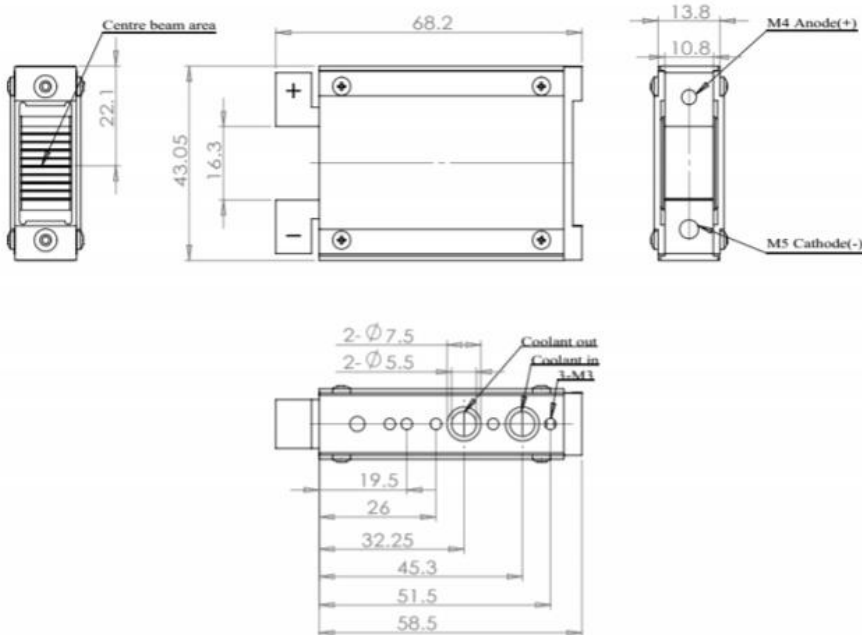

Notes

- Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.
- Please make sure that the laser diode is operated under the temperature between 15 °C and 35 °C, as high temperature will increase threshold current, decrease exchange rate and accelerate the aging.
- Please take measures to avoid condensation, which will cause aging of laser diode.
- Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result.
- Observing visible or invisible laser beams with human eye directly, or indirectly, can cause permanent damage. Do not look directly into the laser output port.