



DBY Laser Safety Eyewear Lens Filter

PROTECTION SPECIFICATIONS



CE Rating

Wavelength (nm)	L-Rating
180-315	D LB7 + R LB4
>315-534	D LB5 + IRM LB6
850-925	DIRM LB5
>925-980	D LB5 + IRM LB6
>980-1064	D LB6 + IRM LB7
>1064-1085	DIRM LB5 S

Optical Density

Wavelength (nm)	OD
190-534	7+
850-925	5+
925-1070	6+
960-1064	7+

SPECTROPHOTOMETRY

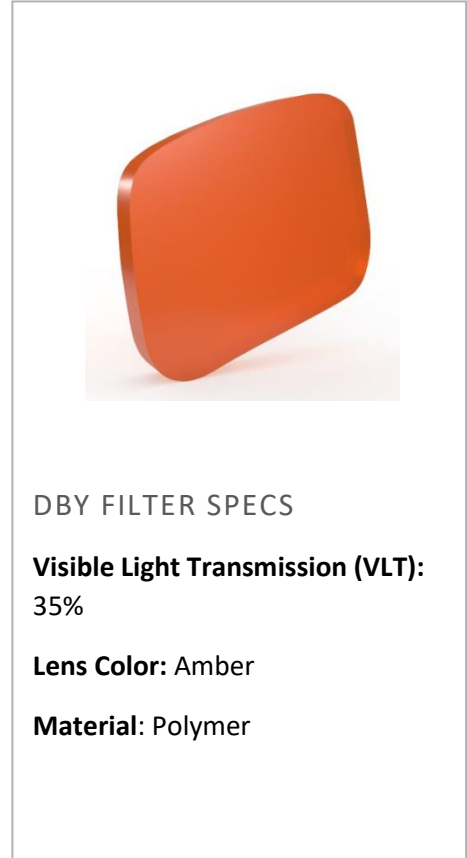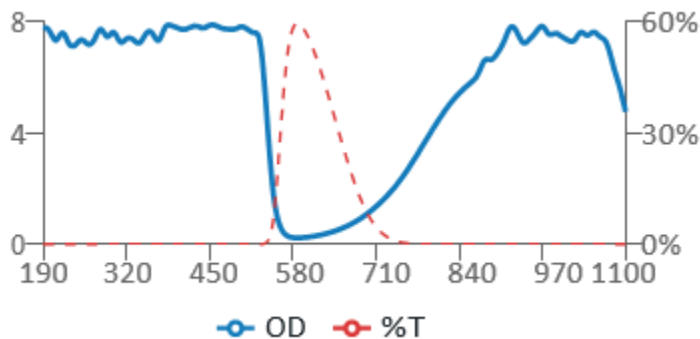

DBY FILTER SPECS

Visible Light Transmission (VLT):
35%

Lens Color: Amber

Material: Polymer

Notes

- The specifications are subject to change without notice.
- For filters designed for non-coherent, non-laser applications, the wavelength ranges and OD specifications are nominal and will not be printed on the filters.
- Filter characteristic data points are nominally represented here solely for informational purposes. We guarantee only those specifications, including Optical Densities, CE ratings and VLT, that are imprinted on the eye protectors and listed on filter data sheets and web pages.