



## DI4 Laser Safety Eyewear Lens Filter

### PROTECTION SPECIFICATIONS


#### CE Rating

Wavelength (nm)	L-Rating
180-315	D LB7 + R LB3
>315-395	D LB5 + R LB6
625-670 + >800-830	I LB4
625-830	DR LB4
>670-800	I LB5
>830-850	DIR LB3
>850-860	DIR LB2
10600	DI LB2 S

#### Optical Density


Wavelength (nm)	OD
190-400	5+
625-850	4+
633	5+
662-835	5+

### SPECTROPHOTOMETRY

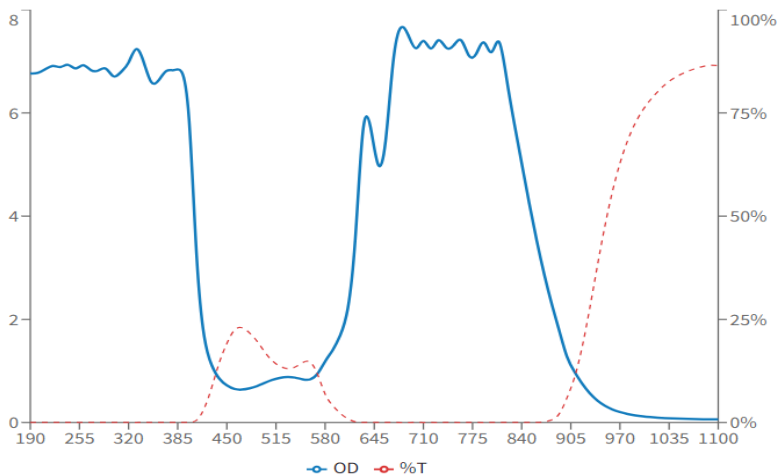

### Notes

- The specifications are subject to change without notice.
- For filters designed for non-coherent, non-laser applications, the wavelength ranges and OD specifications are nominal and will not be printed on the filters.
- Filter characteristic data points are nominally represented here solely for informational purposes. We guarantee only those specifications, including Optical Densities, CE ratings and VLT, that are imprinted on the eye protectors and listed on filter data sheets and web pages.



#### DI4 FILTER SPECS

**Visible Light Transmission (VLT):**  
12%

**Lens Color:** Blue

**Material:** Polymer