



DI6 Laser Safety Eyewear Lens Filter

PROTECTION SPECIFICATIONS

CE Rating

Wavelength (nm)	L-Rating
610-664 + 735-789	DIR LB1
665-669 + >690-698	DIR LB2
670-690 + 808-1050	DIR LB3
790-807 + >1050-1080	DIR LB2

Optical Density

Wavelength (nm)	OD
610-664	1+
665-<670	2+
670-690	3+
>690-698	2+
735-789	1+
790-<808	2+
808-1050	3+
>1050-1080	2+




DI6 FILTER SPECS

Visible Light Transmission (VLT):
35%

Lens Color: Green

Material: Polymer

SPECTROPHOTOMETRY

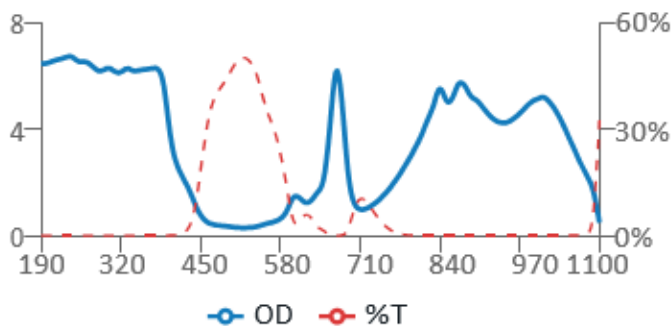

Notes

- The specifications are subject to change without notice.
- For filters designed for non-coherent, non-laser applications, the wavelength ranges and OD specifications are nominal and will not be printed on the filters.
- Filter characteristic data points are nominally represented here solely for informational purposes. We guarantee only those specifications, including Optical Densities, CE ratings and VLT, that are imprinted on the eye protectors and listed on filter data sheets and web pages.