



IRD Laser Safety Eyewear Lens Filter

PROTECTION SPECIFICATIONS


CE Rating

| Wavelength (nm) | L-Rating |
|-----------------|---------------|
| 180-315 | D LB6 + R LB4 |
| >315-400 | DR LB4 |
| 700-770 | DIR LB1 |
| >770-820 | DIR LB2 |
| >820-865 | DIR LB3 |
| >865-940 | DIR LB4 |
| >940-1064 | DIRM LB5 |
| >1064-1400 | DIRM LB4 |
| >1400-1840 | DI LB2 |
| >1840-1950 | DI LB1 |

Optical Density

| Wavelength (nm) | OD |
|-----------------|----|
| 190-450 | 6+ |
| 700-770 | 1+ |
| >770-1840 | 2+ |
| 820-1720 | 3+ |
| 870-1600 | 4+ |
| 940-1070 | 5+ |
| >1840-1950 | 1+ |

SPECTROPHOTOMETRY

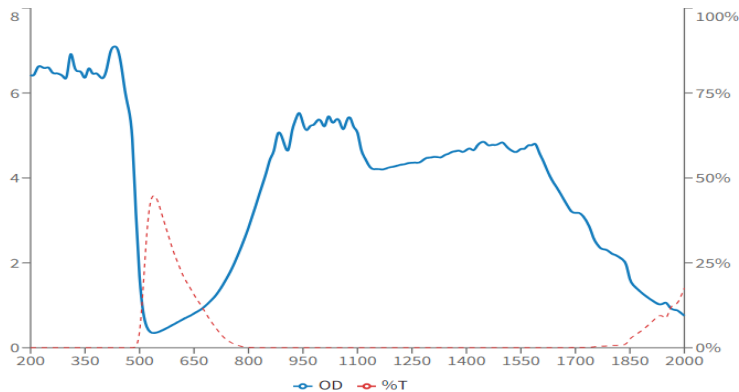

Notes

- The specifications are subject to change without notice.
- Filter characteristic data points are nominally represented here solely for informational purposes. We guarantee only those specifications, including Optical Densities, CE ratings and VLT, that are imprinted on the eye protectors and listed on filter data sheets and web pages.



IRD FILTER SPECS

Visible Light Transmission (VLT):
19%

Lens Color: Green

Material: Polymer