

KTP Laser Safety Eyewear Lens Filter

PROTECTION SPECIFICATIONS


CE Rating


Wavelength (nm)	L-Rating
190-435 + 523-535	DIRM LB5
532	DIRM LB6 S

Optical Density

Wavelength (nm)	OD
190-435	5+
523-535	5+
532	6+

SPECTROPHOTOMETRY

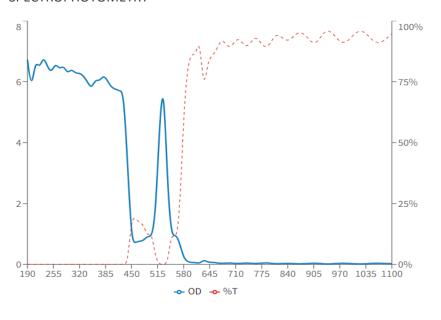



Visible Light Transmission (VLT): 34%

34%

Lens Color: Red

Material: Polymer

Notes

- The specifications are subject to change without notice.
- For filters designed for non-coherent, non-laser applications, the wavelength ranges and OD specifications are nominal and will not be printed on the filters.
- Filter characteristic data points are nominally represented here solely for informational purposes. We guarantee
 only those specifications, including Optical Densities, CE ratings and VLT, that are imprinted on the eye protectors
 and listed on filter data sheets and web pages.