



ML1

Laser Safety Eyewear Lens Filter

PROTECTION SPECIFICATIONS


CE Rating

Wavelength (nm)	L-Rating
190-315	D LB8 + IR LB4
>315-420	DIR LB5
>420-445	DIR LB4
765-1100	DIRM LB5
775-1085	D LB5 + IRM LB6
790-1080	D LB6 + IRM LB7
950-1085	DIRM LB6 S

Optical Density

Wavelength (nm)	OD
190-420	5+
765-1100	5+
775-1085	6+
790-1080	7+

SPECTROPHOTOMETRY

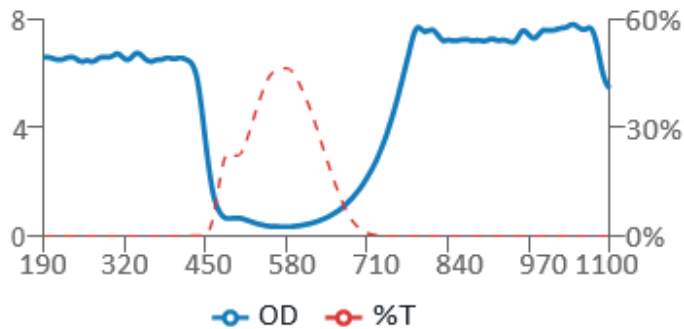

ML1 FILTER SPECS

Visible Light Transmission (VLT):
45%

Lens Color: Green

Material: Polymer

Notes

- The specifications are subject to change without notice.
- For filters designed for non-coherent, non-laser applications, the wavelength ranges and OD specifications are nominal and will not be printed on the filters.
- Filter characteristic data points are nominally represented here solely for informational purposes. We guarantee only those specifications, including Optical Densities, CE ratings and VLT, that are imprinted on the eye protectors and listed on filter data sheets and web pages.