



PWV Laser Safety Eyewear Lens Filter

PROTECTION SPECIFICATIONS

CE Rating

Wavelength (nm)	L-Rating
315-532	D LB6 + IR LB8 + M LB7Y
533-535 + 730-744	DIRM LB5
745-750	DIRM LB6
751-754	DIRM LB7
755-1100	D LB7 + I LB9 + R LB8 + M LB8Y S

Optical Density

Wavelength (nm)	OD
190-532	8+
730-1110	5+
745-1100	7+
753-765	9+
765-800	10+
>800-980	8+
>980-1065	10+




PWV FILTER SPECS

Visible Light Transmission (VLT):
13%

Lens Color: Amber

Material: Polymer

SPECTROPHOTOMETRY

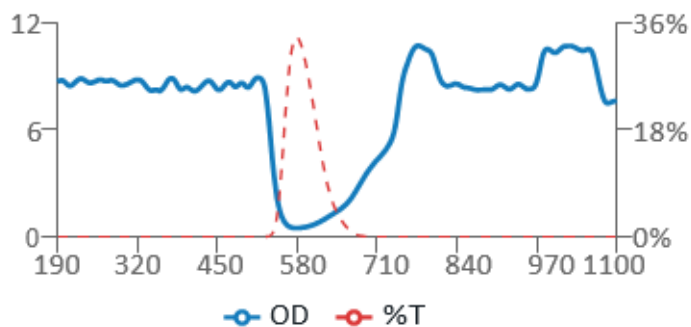

Notes

- The specifications are subject to change without notice.
- For filters designed for non-coherent, non-laser applications, the wavelength ranges and OD specifications are nominal and will not be printed on the filters.
- Filter characteristic data points are nominally represented here solely for informational purposes. We guarantee only those specifications, including Optical Densities, CE ratings and VLT, that are imprinted on the eye protectors and listed on filter data sheets and web pages.