

PROTECTION SPECIFICATIONS


CE Rating


Wavelength (nm)	L-Rating
Pending	

Optical Density

Wavelength (nm)	OD
190-400	5+
575-595	2+
580-590	2+
800-1800	.5+
880-1100	1+



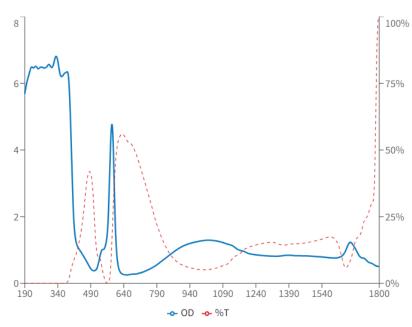

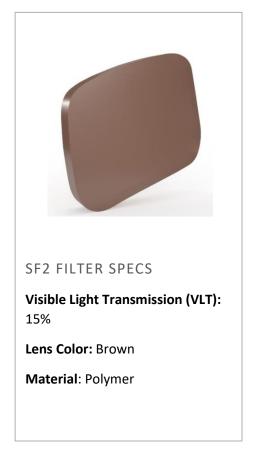

Notes

- The specifications are subject to change without notice.
- For filters designed for non-coherent, non-laser applications, the wavelength ranges and OD specifications are nominal and will not be printed on the filters.
- Filter characteristic data points are nominally represented here solely for informational purposes. We guarantee only those specifications, including Optical Densities, CE ratings and VLT, that are imprinted on the eye protectors and listed on filter data sheets and web pages.

Lasermate Group, Inc. – The Friend of Lasers

Tel: (909) 718-0999 | Fax: (909) 718-0998 | sales@lasermate.com | www.lasermate.com