




VCC-85A2GMM

2.5Gbps Multi-Mode 850nm VCSEL Chip

Description

The Lasermate VCC-85A2GMM is a high speed, 2.5Gbps, 850nm wavelength, multimode Vertical Cavity Surface Emitting Laser (VCSEL) chip designed for high-speed data communication, Gigabit ethernet, and Fiber channel applications.



Features

- 850nm VCSEL chip
- High data rate >2.5Gbps
- Low current and voltage

Applications

- High speed Data communications
- Gigabit ethernet
- Fiber channel


Specifications

Absolute Maximum Ratings						
Parameters	Min.	Max.	Unit	Conditions		
Storage Temperature	-40	100	°C			
Operating Temperature	-40	85	°C			
Continuous Forward Current		12	mA			
Continuous Reverse Voltage		5	V	10uA		

Electro-Optical Characteristics (T _a =25°C unless otherwise stated)						
Parameters	Symbol	Min.	Typ.	Max.	Unit	Conditions
Threshold Current	I _{th}		1.0	2.0	mA	CW
Slope Efficiency	η		0.3	0.5	W/A	I _f =7mA
Optical Output Power	P _o		1.8		mW	I _f =7mA
Peak Wavelength	λ _p	840	850	860	nm	I _f =7mA
Spectral Bandwidth (RMS)	Δλ			0.85	nm	I _f =7mA
Beam Divergence	Θ	14		30	°	P _o =1.8mW, (Full Width, 1/e ²)
Forward Voltage	V _f		1.8	2.2	V	I _f =7mA
Breakdown Voltage	V _b		-10		V	
Dynamic Resistance	R _d		40	55	Ohm	I _f =7mA

Thermal Characteristics						
Parameters	Symbol	Min.	Typ.	Max.	Unit	Conditions
I _{th} Temperature Variation	ΔI _{th}			2.0	mA	T _a =-40 to 85°C
η Temperature Coefficient	Δη/ΔT		-0.5		%/°C	T _a =-40 to 85°C, I _f =7mA
λ Temperature Coefficient	Δλ/ΔT		0.06		nm/°C	T _a =-40 to 85°C, I _f =7mA

Outline Dimensions

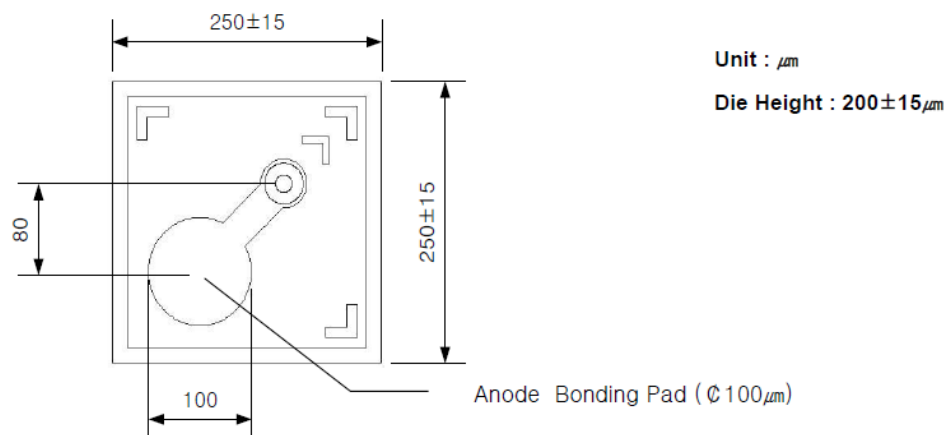

Additional Notes

- The inherent design of this component causes it to be sensitive to electrostatic discharge (ESD). To prevent ESD-induced damage and/or degradation to equipment, take normal ESD precautions when handling this product.
- Specifications are subject to change without notice.