

YG2 Laser Safety Eyewear Lens Filter

PROTECTION SPECIFICATIONS


CE Rating

Wavelength (nm)	L-Rating
180-315	D LB6 + R LB4
>315-400	DR LB4
720-725	DM LB5
720-750 + >1064-1075	IR LB5
>725-1075	DM LB6
>750-1064	IRM LB7 S

Optical Density

Wavelength (nm)	OD
180-400	6+
720-1090	5+
750-1064	7+

SPECTROPHOTOMETRY

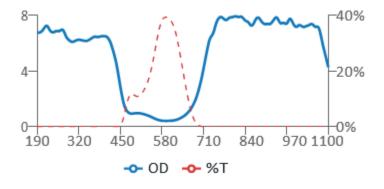

YG2 FILTER SPECS Visible Light Transmission (VLT): 25% Lens Color: Amber Material: Polymer

Notes

- The specifications are subject to change without notice.
- For filters designed for non-coherent, non-laser applications, the wavelength ranges and OD specifications are nominal and will not be printed on the filters.
- Filter characteristic data points are nominally represented here solely for informational purposes. We guarantee
 only those specifications, including Optical Densities, CE ratings and VLT, that are imprinted on the eye protectors
 and listed on filter data sheets and web pages.