



YG3 Laser Safety Eyewear Lens Filter

PROTECTION SPECIFICATIONS


CE Rating

Wavelength (nm)	L-Rating
190-315	D LB8 + IR LB4 + M LB6Y
>315-425	DIRM LB5
790-<808	DIRM LB3
808-840	DIRM LB4
>840-950	DIRM LB5
>950-1080	D LB6 + IRM LB7
1080-1090	DIRM LB5 S

Optical Density


Wavelength (nm)	OD
190-400	5+
808-840	4+
>840-950	5+
>950-1080	7+
>1080-1090	5+

SPECTROPHOTOMETRY

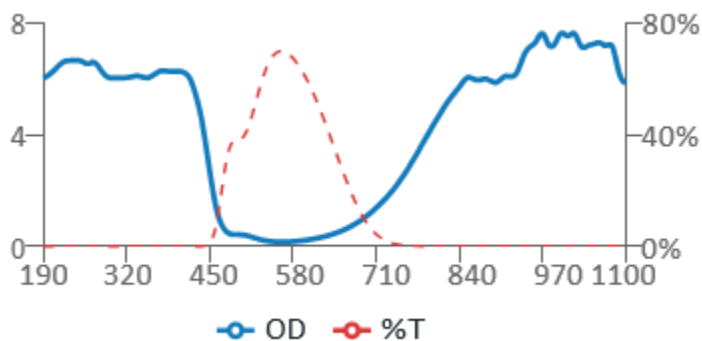

Notes

- The specifications are subject to change without notice.
- For filters designed for non-coherent, non-laser applications, the wavelength ranges and OD specifications are nominal and will not be printed on the filters.
- Filter characteristic data points are nominally represented here solely for informational purposes. We guarantee only those specifications, including Optical Densities, CE ratings and VLT, that are imprinted on the eye protectors and listed on filter data sheets and web pages.

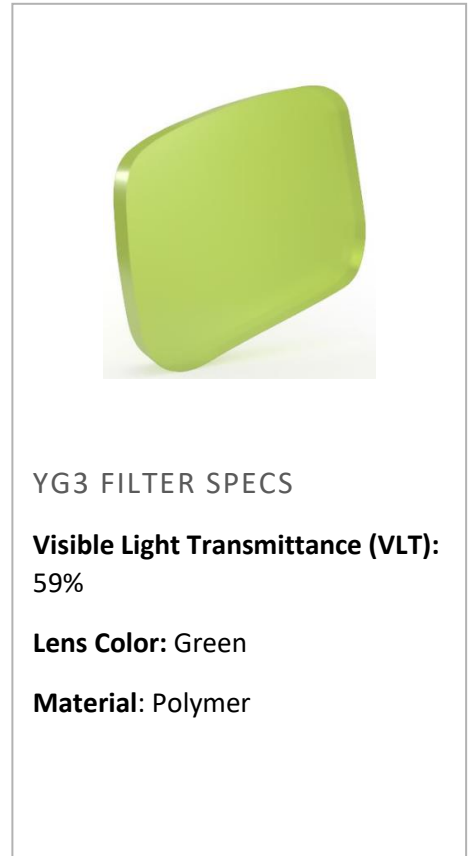

YG3 FILTER SPECS

Visible Light Transmittance (VLT):
59%

Lens Color: Green

Material: Polymer