



## YGH Laser Safety Eyewear Lens Filter

### PROTECTION SPECIFICATIONS


#### CE Rating

Wavelength (nm)	L-Rating
190-315	D LB6 + IR LB5 + M LB6Y
316-400	DIRM LB6
525-540	DIRM LB5
532-535	D LB6 + IR LB7 + M LB7Y
1025-1080	DIRM LB5
1035-1070	DIRM LB6
1045-1065	D LB6 + IR LB7 + M LB7Y

#### Optical Density

Wavelength (nm)	OD
190-400	6+
525-540 + 1025-1080	5+
1035-1070	6+
532-535 + 1045-1065	7+

### SPECTROPHOTOMETRY

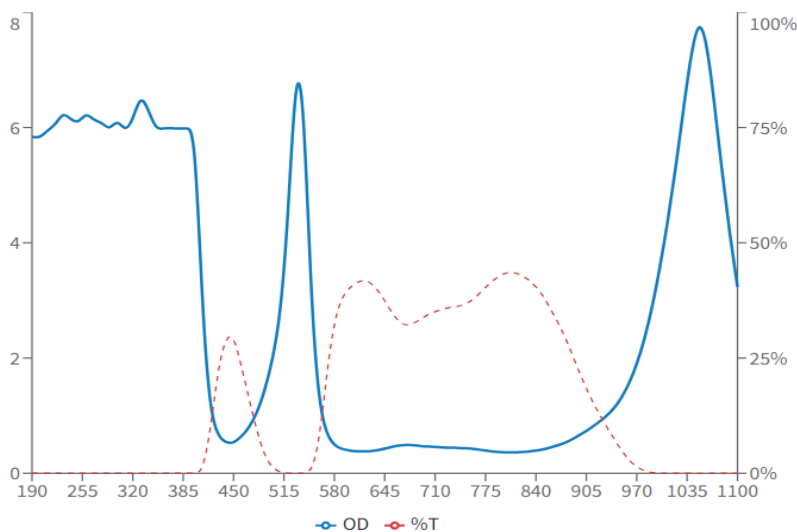

### Notes

- The specifications are subject to change without notice.
- For filters designed for non-coherent, non-laser applications, the wavelength ranges and OD specifications are nominal and will not be printed on the filters.
- Filter characteristic data points are nominally represented here solely for informational purposes. We guarantee only those specifications, including Optical Densities, CE ratings and VLT, that are imprinted on the eye protectors and listed on filter data sheets and web pages.



#### YGH FILTER SPECS

#### Visible Light Transmission (VLT):

21%

**Lens Color:** Pink

**Material:** Polymer