


## VDOE940COB10K

940nm 1.2W VCSEL with 10980-Random Dots Pattern



### Description

The Lasermate VDOE940COB10K is a 940nm wavelength, VCSEL integrated with advanced 10,980-dot pattern diffractive optical element (DOE). The VCSEL is specially designed for open-space 3D structure light. With ultra-small thermally efficient COB package, its compact footprint enables economics of scale and excellent integration flexibility.

### Features

- 940nm wavelength VCSEL
- High uniform pattern
- Ultra-small COB package
- Standard solder reflow-able
- Low power consumption
- IEC 60825 eye safety standards
- 10,980-dot pattern

### Applications

- Portable device
- Structured light for 3D sensing

### Specifications

Electrical-Optical Characteristics							
Parameter	Symbol	Min.	Typ.	Max	Unit	Conditions	
Threshold current	$I_{th}$		360		mA		
Forward voltage	$V_f$		1.75	1.95	V		
Center wavelength	$\lambda_c$	930	940	950	nm		

Temperature Dependent Characteristics							
Parameter	Symbol	Min.	Typ.	Max	Unit	Conditions	
Wavelength shift	$\Delta\lambda/\Delta T$		0.1		nm/°C	25 °C~100 °C	
Output power decay	$\Delta P_o/\Delta T$		-16.81		mW/°C	25 °C~100 °C	
Forward voltage decay	$\Delta V_f/\Delta T$		-0.0022		V/°C	25 °C~100 °C	


DOE Specifications	
Pattern size @ 100cm	1708.2 x 1154.7mm (HxV)
Total dots	10,980
Field of View (FOV)	81° x 60° (HxV)
Contrast <sup>1</sup>	$\geq 7$
Uniformity <sup>2</sup> in FOV at 1m	$\geq 30\%$

<sup>1</sup> Contrast: in the defined area, the ratio of the 95th percentile of the grayscale value over the mode grayscale value of the background,  $C=I_{95\%}/I_{median}$


<sup>2</sup> Uniformity: the ratio of the grayscale value of the area at a given location to the grayscale value of the area in the center of the pattern,  $U=I_{each\ area}/I_{max\ of\ each\ area}$

### Typical Characteristic Curves


Laser module characteristic I-V Curve

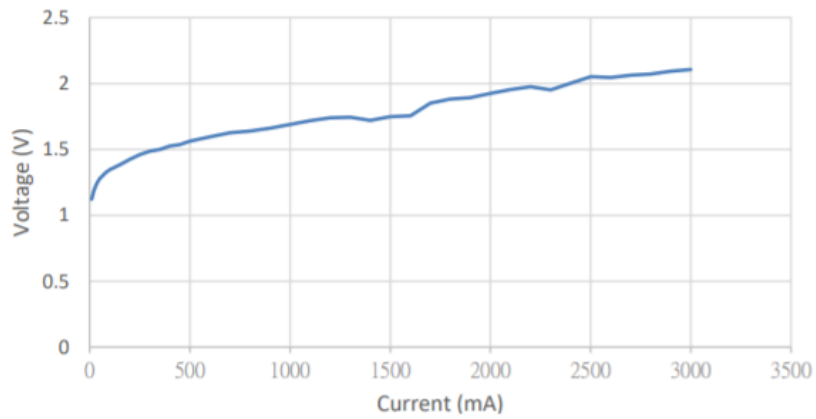


Laser module characteristic I-P Curve

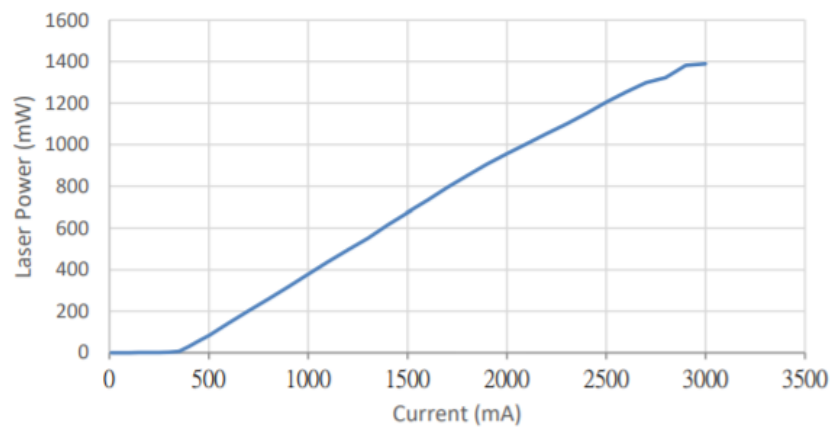


Electrical-to-optical conversion efficiency

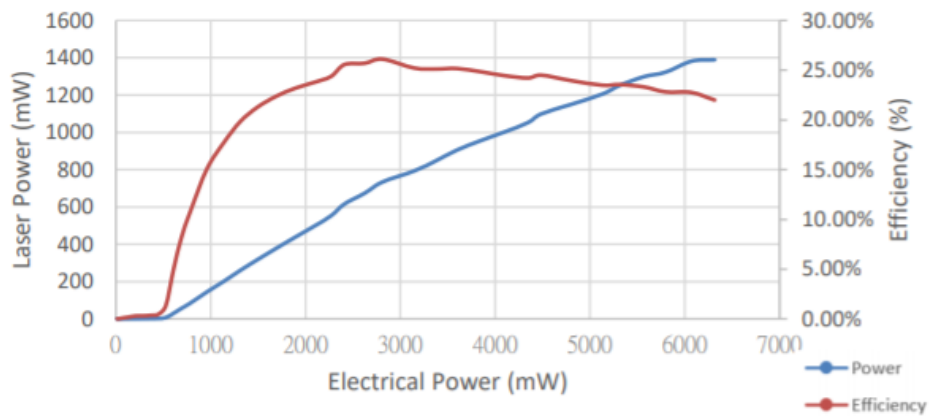

### Projecting Pattern

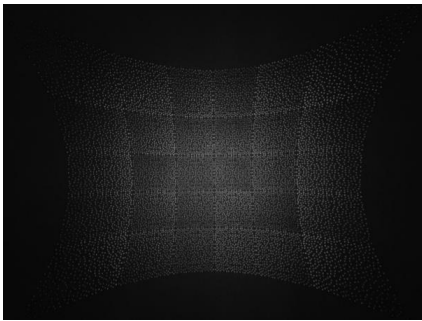


### Mechanical Dimensions

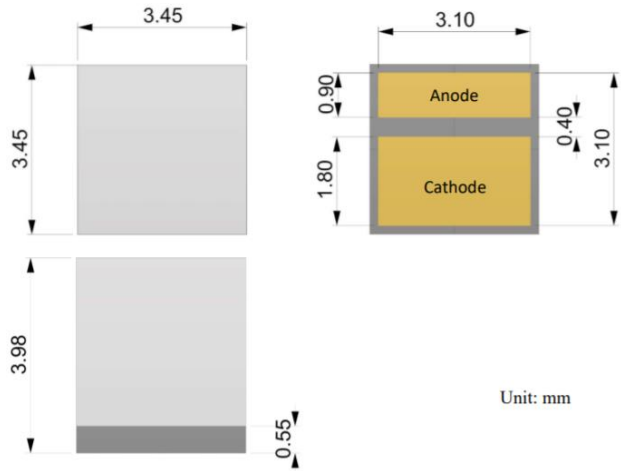


Unit: mm

### Orientation of Field of View

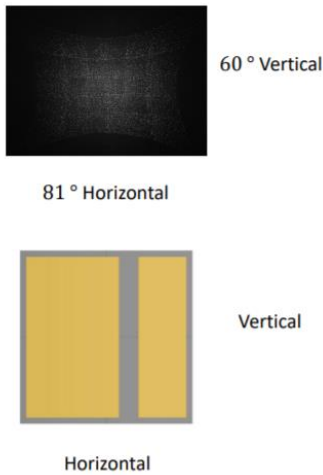

### Recommended Solder Pad (unit: mm)

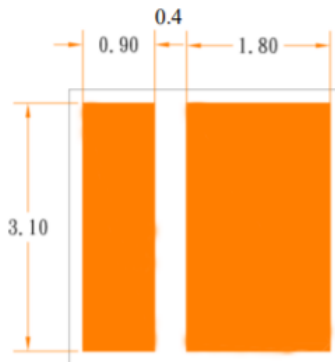

### Caution

- Treat heat dissipation before setting the module to full power.
- Avoid touching the emitting area or optical components of the module.
- Never look directly at the light from the emitting area.

### Additional Notes

- The VCSELs are designated solely as OEM components for incorporation into the customer's end products. Therefore, it is the customer's responsibility to comply with the appropriate requirements of FDA 21CFR, section 1040.10 and 1040.11 for complete laser products. For the code of FDA regulations, please refer to [FDA Performance Standards for Light-Emitting Products](#) for detailed information.
- Specifications are subject to change without notice.