


VDOE940COB11K

940nm 800mW VCSEL with 11664-Random Dots Pattern



Description

The Lasermate VDOE940COB11K is a 940nm wavelength, VCSEL integrated with advanced 11,664-dot pattern diffractive optical element (DOE). The VCSEL is specially designed for open-space 3D structure light. With ultra-small thermally efficient COB package, its compact footprint enables economics of scale and excellent integration flexibility.

Features

- 940nm wavelength VCSEL
- High uniform pattern
- Ultra-small COB package
- Standard solder reflow-able
- Low power consumption
- IEC 60825 eye safety standards
- 11,664-dot pattern

Applications

- Portable device
- Structured light for 3D sensing

Specifications

Electrical-Optical Characteristics						
Parameter	Symbol	Min.	Typ.	Max	Unit	Conditions
Operating temperature	T_{op}	0	35	60	°C	Measured at the bottom of VCSEL die substrate during typical operating conditions
Operating current	I_{op}	-	1100	-	mA	
Threshold current	I_{th}	40	132.5	225	mA	
Forward voltage	V_f	1.6	2	2.3	V	
Center wavelength	λ_c	932.7	940.7	948.7	nm	


DOE Specifications	
Parameter	
Pattern size @ 100cm	975.5 x 1374.6mm (HxV)
Total dots	11,664
Field of View (FOV)	52° x 69° (HxV)
Contrast ¹	≥ 10
Uniformity ² in FOV at 1m	$\geq 30\%$

¹ Contrast: in the defined area, the ratio of the 95th percentile of the grayscale value over the mode grayscale value of the background,
 $C = I_{95\%} / I_{median}$


² Uniformity: the ratio of the grayscale value of the area at a given location to the grayscale value of the area in the center of the pattern,
 $U = I_{each\ area} / I_{max\ of\ each\ area}$

Typical Characteristic Curves


Laser module characteristic I-V Curve

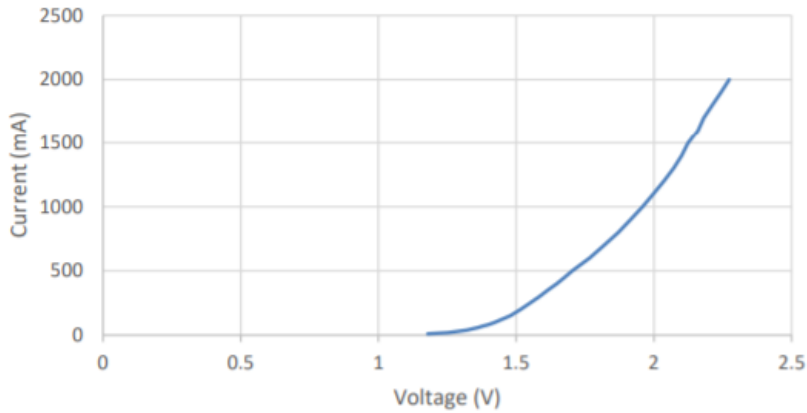

Laser module characteristic I-P Curve

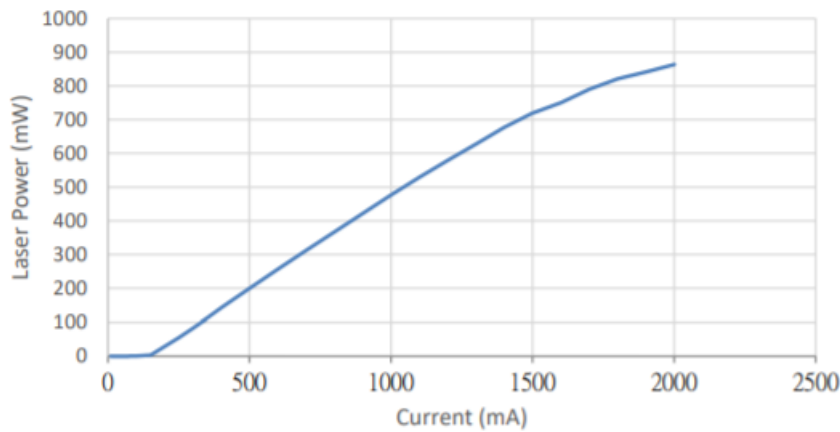


Electrical-to-optical conversion efficiency

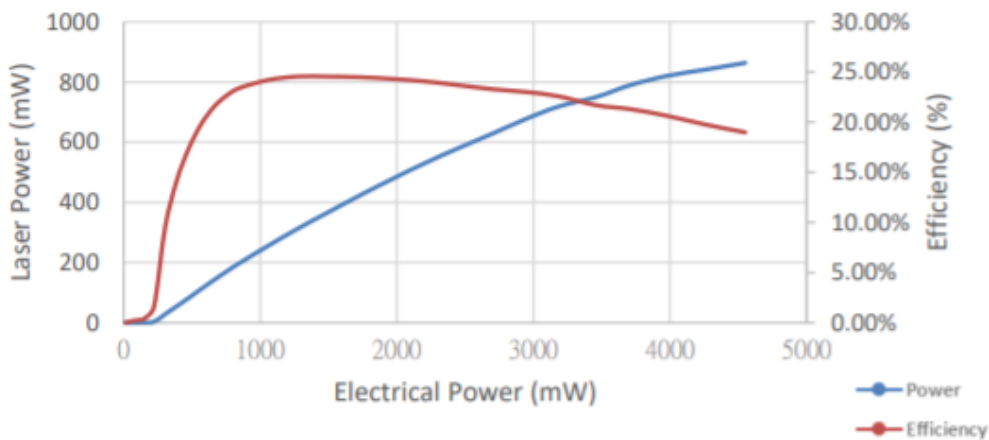

Projecting Pattern




Mechanical Dimensions

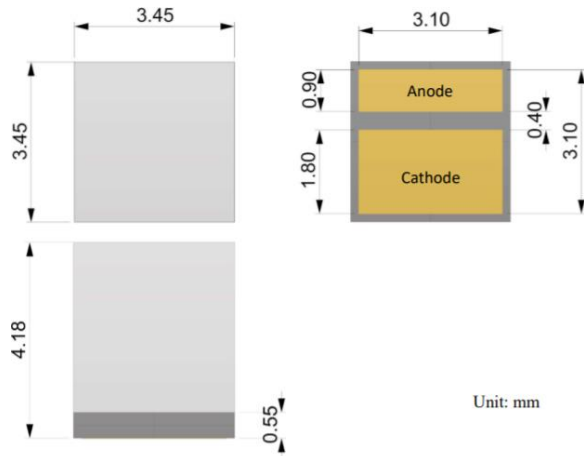


Unit: mm

Orientation of Field of View

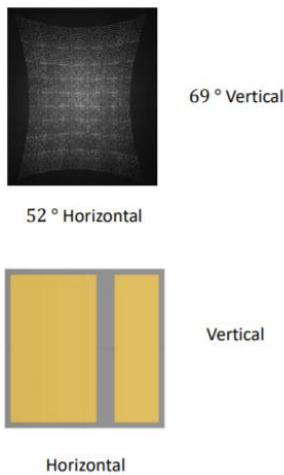

Recommended Solder Pad (unit: mm)

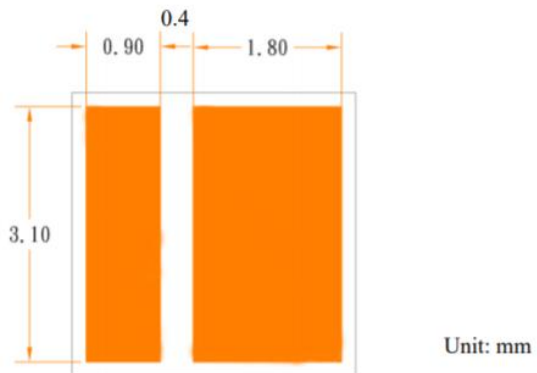

Unit: mm

Caution

- Treat heat dissipation before setting the module to full power.
- Avoid touching the emitting area or optical components of the module.
- Never look directly at the light from the emitting area.

Additional Notes

- The VCSELs are designated solely as OEM components for incorporation into the customer's end products. Therefore, it is the customer's responsibility to comply with the appropriate requirements of FDA 21CFR, section 1040.10 and 1040.11 for complete laser products. For the code of FDA regulations, please refer to [FDA Performance Standards for Light-Emitting Products](#) for detailed information.
- Specifications are subject to change without notice.