


VDOE940COB5K

940nm 600mW VCSEL with 5000-Random Dots Pattern



Description

The Lasermate VDOE940COB5K is a 940nm wavelength, VCSEL integrated with advanced 5,000-dot pattern diffractive optical element (DOE). The VCSEL is specially designed for open-space 3D structure light. With ultra-small thermally efficient COB package, its compact footprint enables economics of scale and excellent integration flexibility.

Features

- 940nm wavelength VCSEL
- Ultra-small COB package
- Standard solder reflow-able
- Low power consumption
- IEC 60825 eye safety standards
- High uniform 5,000-dot pattern

Applications

- Portable device
- Structured light for 3D sensing

Specifications

Electrical-Optical Characteristics						
Parameter	Symbol	Min.	Typ.	Max	Unit	Conditions
Operation temperature	T_{op}	0	35	60	°C	Measured at the bottom of the VCSEL die substrate during typical operating conditions
Output power	P_o		600		mW	$I_F=800mA$
Threshold current	I_{th}		200		mA	
Forward voltage	V_f		1.9		V	$I_F=800mA$
Slope efficiency	η		1		W/A	
Power conversion efficiency	PCE		40		%	$I_F=800mA$
Center wavelength	λ_c	930	940	950	nm	
Wavelength shift	$\Delta\lambda/\Delta T$		0.07		nm/°C	

Note: All parameters are measured at 25°C. Pulse operation (pulse width=0.3ms, duty cycle=1%)


DOE Specifications	
Pattern size @ 100cm	1041x869.6 mm (HxV)
Total dots	5,000
Field of View (FOV)	55° x 47° (HxV)
Contrast ¹	≥22
Uniformity ²	≥60%

¹ Contrast: in the defined area, the ratio of the 95th percentile of the grayscale value over the mode grayscale value of the background, $C=I_{95\%}/I_{median}$


² Uniformity: the ratio of the grayscale value of the area at a given location to the grayscale value of the area in the center of the pattern, $U=I_{each\ area}/I_{max\ of\ each\ area}$

Typical Characteristic Curves


Typical LI Curve

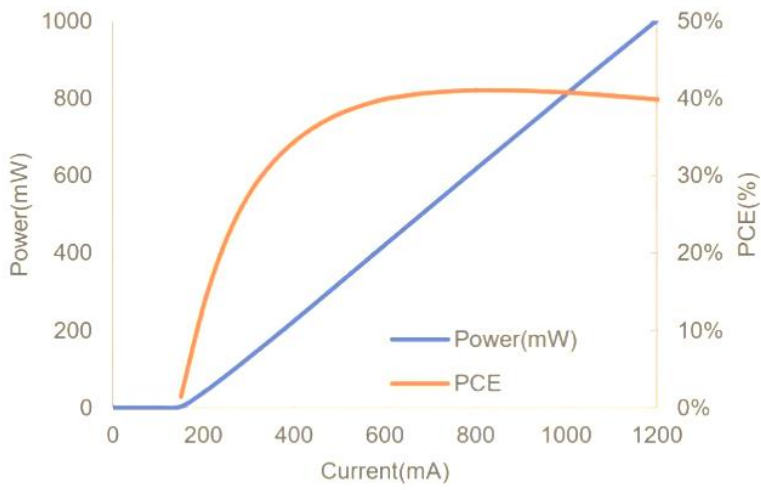


Projecting Pattern

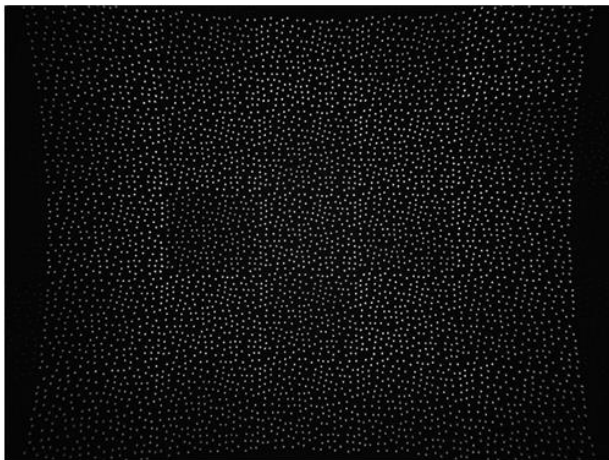

Mechanical Dimensions

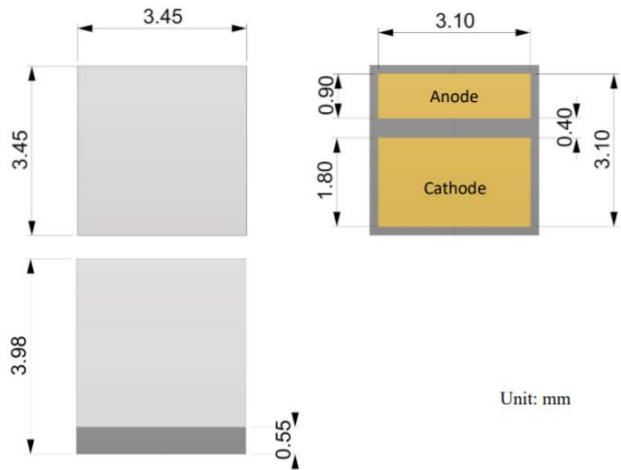

Orientation of Field of View

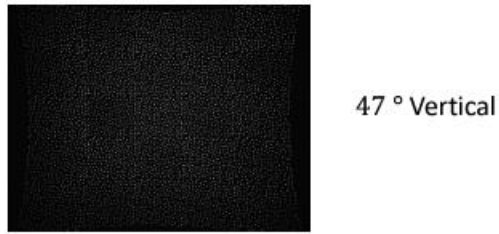


55 ° Horizontal



Horizontal

Recommended Solder Pad (unit: mm)

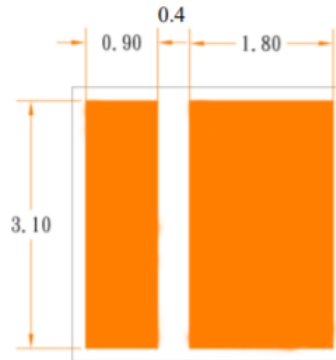

Caution

- Treat heat dissipation before setting the module to full power.
- Avoid touching the emitting area or optical components of the module.
- Never look directly at the light from the emitting area.

Additional Notes

- The VCSELs are designated solely as OEM components for incorporation into the customer's end products. Therefore, it is the customer's responsibility to comply with the appropriate requirements of FDA 21CFR, section 1040.10 and 1040.11 for complete laser products. For the code of FDA regulations, please refer to [FDA Performance Standards for Light-Emitting Products](#) for detailed information.
- Specifications are subject to change without notice.