



1.25Gbps 1550nm SMF 50km 2x5 SFF Optical Transceiver with Duplex LC Connector

CS15D-24K-3L-Tx-L



DESCRIPTION

The CS15D-24K-3L-Tx-L duplex 2x5 SFF (Small Form Factor) optical transceivers are high performance, cost effective optical transceiver modules for serial optical data communications application specified for a data rate of 1.25Gb/s. The 2x5 SFF transceiver module provides 50km transmission distance over single mode fiber at nominal wavelength of 1550nm. The optical transceiver is RoHS compliant.

FEATURES

- RoHS compliant
- Compliant with IEEE 802.3z Gigabit Ethernet standard
- Compliant with Fiber Channel standard
- Industry standard 2x5 footprint
- LC duplex connector
- Single power supply 3.3V
- Compatible with solder and aqueous wash processes
- Class 1 laser product compliant with EN 60825-1
- Input/Output: AC/AC
- Signal Detect: LVTTTL
- Up to 50km over single mode fiber

APPLICATIONS

- 1000Base-XD

PRODUCT OVERVIEW

| PART NUMBER | OPERATING TEMPERATURE |
|--------------------|------------------------------|
| CS15D-24K-3L-TC-L | 0°C to 70°C |
| CS15D-24K-3L-TI-L | -40°C to 85°C |

ABSOLUTE MAXIMUM RATINGS

| PARAMETER | SYMBOL | MIN | MAX | UNIT | NOTES |
|-----------------------|------------|------|----------|------|---------------------|
| Storage Temperature | T_S | -40 | 85 | °C | |
| Supply Voltage | V_{CC} | -0.5 | 4.0 | V | |
| Input Voltage | V_{IN} | -0.5 | V_{CC} | V | |
| Operating Current | I_{OP} | - | 400 | mA | |
| Soldering Temperature | T_{SOLD} | - | 260 | °C | 10 seconds on leads |

OPERATING ENVIRONMENT

| PARAMETER | SYMBOL | MIN | MAX | UNIT | NOTES |
|----------------------------|----------|-----|-----|------|-------------------|
| Case Operating Temperature | T_C | 0 | 70 | °C | CS15D-24K-3L-TC-L |
| | | -40 | 85 | | CS15D-24K-3L-TI-L |
| Supply Voltage | V_{CC} | 3.1 | 3.5 | V | |
| Supply Current | I_{CC} | - | 300 | mA | |


TRANSMITTER ELECTRO-OPTICAL CHARACTERISTICS ($V_{CC} = 3.1V$ to $3.5V$, $T_C = 0^\circ C$ to $70^\circ C$, $-40^\circ C$ to $85^\circ C$)

| PARAMETER | SYMBOL | MIN | TYP. | MAX | UNIT | NOTES |
|---|---------------------------|------|------|------|-------|---------|
| Output Optical Power 9/125um fiber | P_{out} | -4 | - | +1 | dBm | Average |
| Extinction Ratio | ER | 7 | - | - | dB | |
| Center Wavelength | λ_C | 1530 | 1550 | 1570 | nm | |
| Spectral Width (RMS) | $\Delta\lambda$ | - | - | 1 | nm | |
| Side Mode Suppression Ratio | SMSR | 30 | - | - | dB | |
| Rise/Fall Time (20~80%) | $T_{r,f}$ | - | - | 260 | ps | |
| Relative Intensity Noise | RIN | - | - | -117 | dB/Hz | |
| Total Jitter | TJ | - | - | 227 | ps | |
| Output Eye | Compliant with IEEE802.3z | | | | | |
| Max. P_{out} TX-DISABLE Asserted | P_{OFF} | - | - | -45 | dBm | |
| Disable Input Voltage-High | T_{dis-H} | 2.2 | - | - | V | |
| Disable Input Voltage-Low | T_{dis-L} | - | - | 0.6 | V | |
| Transmitter Data Input Differential Voltage | V_{DIFF} | 0.4 | - | 2.0 | V | |

RECEIVER ELECTRO-OPTICAL CHARACTERISTICS ($V_{CC} = 3.1V$ to $3.5V$, $T_C = 0^\circ C$ to $70^\circ C$, $-40^\circ C$ to $85^\circ C$)


| PARAMETER | SYMBOL | MIN | TYP. | MAX | UNIT | NOTES |
|---|-------------|------|------|----------|------|-----------------------|
| Optical Input Power-Maximum | P_{IN} | -1 | - | - | dBm | BER<10 ⁻¹² |
| Optical Input Power-Minimum (Sensitivity) | P_{IN} | - | -27 | -24 | dBm | BER<10 ⁻¹² |
| Operating Center Wavelength | λ_C | 1260 | - | 1610 | nm | |
| Optical Return Loss | ORL | 12 | - | - | dB | |
| Signal Detect-Asserted | P_A | - | - | -24 | dBm | |
| Signal Detect-Deasserted | P_D | -35 | - | - | dBm | |
| Signal Detect-Hysteresis | P_A-P_D | 1.0 | - | - | dB | |
| Signal Detect Voltage-High | V_{OH} | 2.4 | - | V_{CC} | V | |
| Signal Detect Voltage-Low | V_{OL} | 0 | - | 0.5 | V | |
| Data Output Rise, Fall time (20~80%) | $T_{r,f}$ | - | - | 0.35 | ns | |
| Data Output Differential Voltage | V_{DIFF} | 0.5 | - | 1.8 | V | |

DRAWING DIMENSIONS (unit: mm)

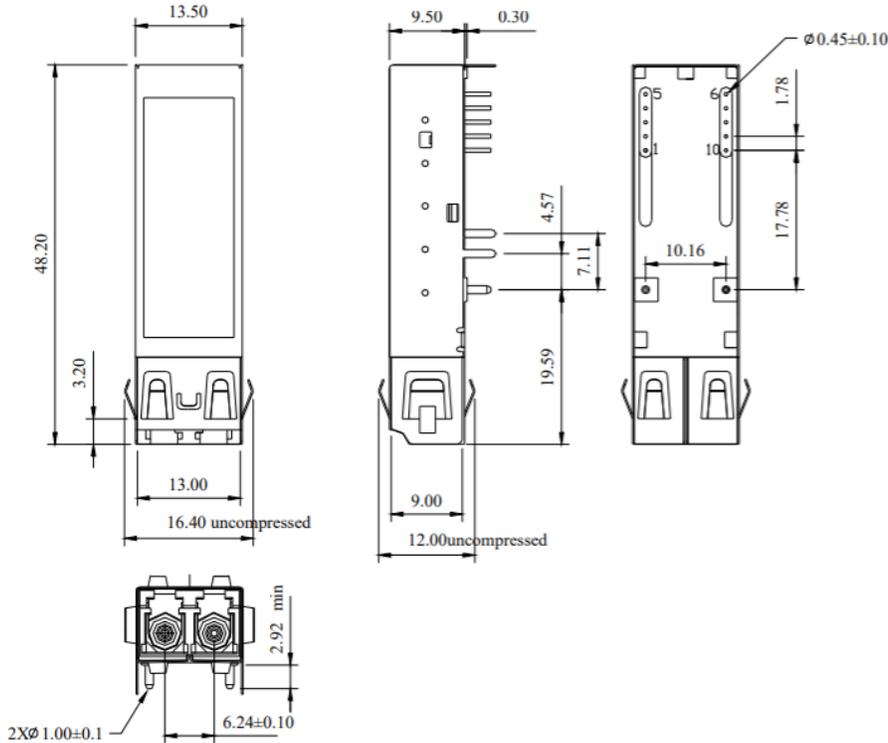

ALL DIMENSIONS ARE ± 0.20 mm UNLESS OTHERWISE SPECIFIED

BLOCK DIAGRAM OF TRANSCEIVER

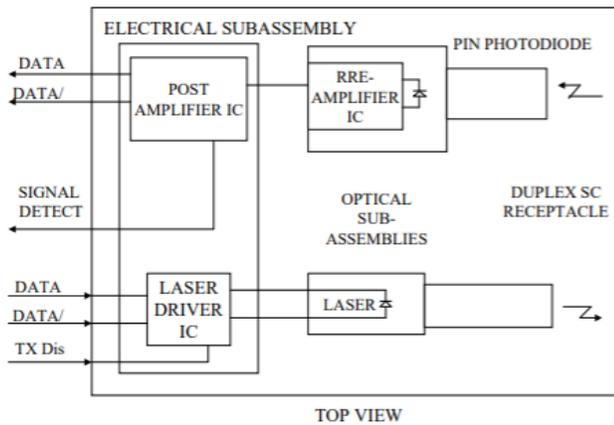


Transmitter Section - The transmitter section consists of a 1310 nm laser in an eye safe optical subassembly (OSA) which mates to the fiber cable. The laser OSA is driven by a LD driver IC which converts differential input LVPECL logic signals into an analog laser driving current.

Receiver Section - The receiver utilizes a MSM detector integrated with a trans-impedance preamplifier in an OSA. This OSA is connected to a circuit providing post-amplification quantization, and optical signal detection.


Receiver Signal Detect - Signal Detect is a basic fiber failure indicator. This is a single-ended LVTTTL output. As the input optical power is decreased, Signal Detect will switch from high to low (deassert point) somewhere between sensitivity and the no light input level. As the input optical power is increased from very low levels, Signal Detect will switch back from low to high (assert point). The assert level will be at least 1.0 dB higher than the deassert level.

CONNECTION DIAGRAM

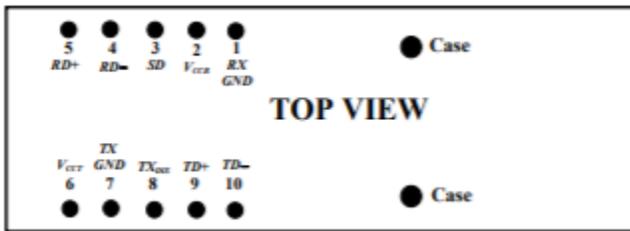

| PIN | SYMBOL | DESCRIPTION |
|-----|---------------|---|
| 1 | <i>RX GND</i> | Receiver Signal Ground. Directly connect this pin to the receiver ground plane. |
| 2 | <i>VCCR</i> | Receiver Power Supply Provide +3.3 Vdc via the recommended receiver power supply filter circuit. Locate the power supply filter circuit as close as possible to the <i>VCCR</i> pin. |
| 3 | <i>SD</i> | Signal Detect. Normal optical input levels to the receiver result in a logic “1” output, <i>V_{OH}</i> , asserted. Low input optical levels to the receiver result in a fault condition indicated by a logic “0” output <i>V_{OL}</i> , deasserted. Signal Detect is a single-ended LVTTTL output. |
| 4 | <i>RD-</i> | Receiver Data Output-Bar Internally ac coupled (100nF). Terminate this differential data output with a 50Ω line and a 50Ω load at the follow-on device (See recommended circuit schematic) |
| 5 | <i>RD+</i> | Receiver Data Output Internally ac coupled (100nF). Terminate this differential data output with a 50Ω line and a 50Ω load at the follow-on device (See recommended circuit schematic) |
| 6 | <i>VCCR</i> | Transmitter Power Supply. Provide +3.3 Vdc via the recommended transmitter power supply filter circuit. Locate the power supply filter circuit as close as possible to the <i>VCCR</i> pin. |
| 7 | <i>TX GND</i> | Transmitter Signal Ground. Directly connect this pin to the transmitter signal ground plane. Directly connect this pin to the transmitter ground plane. |
| 8 | <i>TXDIS</i> | Transmitter Disable. Connect this pin to +3.3V TTL logic high “1” to disable transmitter. To enable module connect to TTL logic low “0” or open. |
| 9 | <i>TD+</i> | Transmitter Data In. Requires an ac coupled input. The input stage is internally biased and 50Ω terminated. (See recommended circuit schematic) |
| 10 | <i>TD-</i> | Transmitter Data In-Bar. Requires an ac coupled input. The input stage is internally biased and 50Ω terminated. (See recommended circuit schematic) |

RECOMMENDED CIRCUIT SCHEMATIC

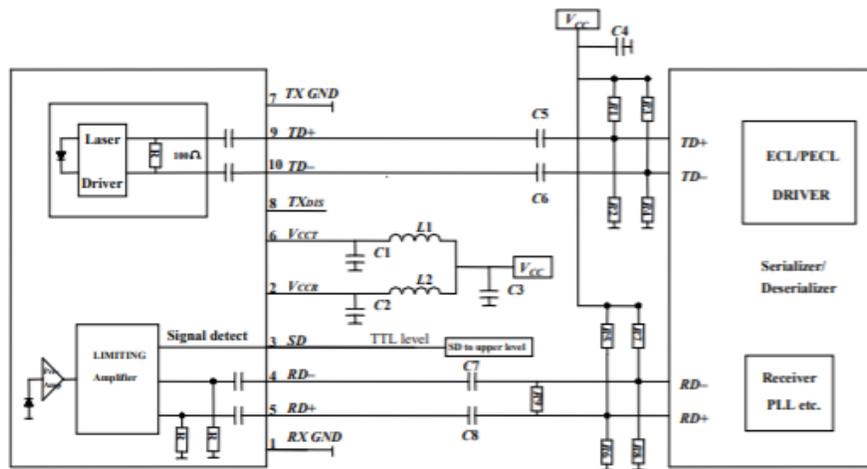

$C1/C2/C4/C5/C6/C7/C8 = 100 \text{ nF}$


$C3 = 4.7 \mu\text{F}$

$L1/L2 = 1 \mu\text{H}$

$R1/R2/R3/R4/R5/R6/R7/R8/R9$ Depend on SerDes

In order to get proper functionality, a recommended circuit is provided in above recommended circuit schematic. When designing the circuit interface, there are a few fundamental guidelines to follow.

- (1) The differential data lines should be treated as 50 Ω Micro strip or strip line transmission lines. This will help to minimize the parasitic inductance and capacitance effects. Locate termination at the received signal end of the transmission line. The length of these lines should be kept short and of equal length.
- (2) For the high-speed signal lines, differential signals should be used, not single-ended signals, and these differential signals need to be loaded symmetrically to prevent unbalanced currents which will cause distortion in the signal.
- (3) Multi-layer plane PCB is best for distribution of VCC, returning ground currents, forming transmission lines and shielding, Also, it is important to suppress noise from influencing the fiber-optic transceiver performance, especially the receiver circuit.
- (4) A separate proper power supply filter circuits shown in Figure for the transmitter and receiver sections. These filter circuits suppress Vcc noise over a broad frequency range, this prevents receiver sensitivity degradation due to VCC noise.
- (5) Surface-mount components are recommended. Use ceramic bypass capacitors for the 0.1 μF capacitors and a surface-mount coil inductor for 1 μH inductor. Ferrite beads can be used to replace the coil inductors when using quieter VCC supplies, but a coil inductor is recommended over a ferrite bead. All power supply components need to be placed physically next to the VCC pins of the receiver and transmitter.
- (6) Use a good, uniform ground plane with a minimum number of holes to provide a low-inductance ground current return for the power supply currents.

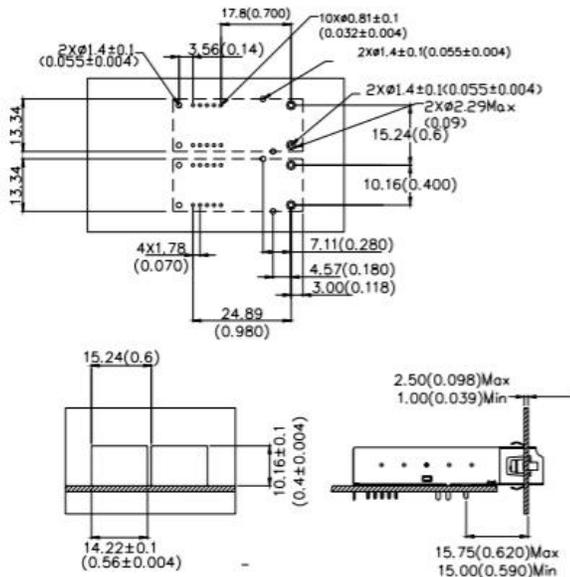RECOMMENDED BOARD LAYOUT HOLE PATTERN

Unit : mm(inches)

This transceiver is compatible with industry standard wave or hand solder processes. After wash process, all moisture must be completely removed from the module. The transceiver is supplied with a process plug to prevent contamination during wave solder and aqueous rinse as well as during handling, shipping or storage.

Solder fluxes should be water-soluble, organic solder fluxes. Recommended cleaning and degreasing chemicals for these transceivers are alcohol's (methyl, isopropyl, isobutyl), aliphatics (hexane, heptane) and other chemicals, such as soap solution or naphtha. Do not use partially halogenated hydrocarbons for cleaning/degreasing.

EYE SAFETY MARK

The single mode transceiver is a class 1 laser product. It complies with EN 60825-1 and FDA 21 CFR 1040.10 and 1040.11. In order to meet laser safety requirements, the transceiver shall be operated within the Absolute Maximum Ratings.

Required Mark

Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11

[Caution] All adjustments have been done at the factory before the shipment of the devices. No maintenance and user serviceable part is required. Tampering with and modifying the performance of the device will result in voided product warranty.

ADDITIONAL NOTES

- Avoid eye or skin exposure to laser radiations.
- The device is sensitive to electro-static discharge (ESD). The device should be handled with ESD proof tools. To assemble the device on PCB, proper grounding is required to prevent ESD.
- Specifications are subject to change without notice.



Lasermate Group, Inc.
19608 Camino De Rosa
Walnut, CA 91789 USA
Tel: (909)718-0999
Fax: (909)718-0998
sales@lasermate.com
www.lasermate.com