




2.5Gbps 1550nm SMF 80km SFP Optical Transceiver with Duplex LC Connector

CS15D-48F-3U-Tx-LD

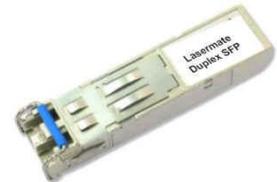

DESCRIPTION

The CS15D-48F-3U-Tx-LD duplex SFP (Small Form Pluggable) optical transceivers are high performance, cost effective optical transceiver modules for serial optical data communications application specified for a data rate of 2.5Gb/s. The SFP transceiver module provides 80km transmission distance over single-mode fiber at nominal wavelength of 1550nm. The optical transceiver is RoHS compliant.

FEATURES

- Compliant with SFF8472 diagnostic monitoring interface
- Industry standard small form pluggable (SFP) package
- Multi-Rate
- Hot pluggable
- Single power supply 3.3V
- Duplex LC connector
- TTL signal detect indicator
- Class 1 laser product compliant with EN 60825-1
- LD Type: DFB
- Input/Output: AC/AC
- Up to 80km over single mode fiber

APPLICATIONS

- L16.2

PRODUCT OVERVIEW

| PART NUMBER | OPERATING TEMPERATURE |
|--------------------|------------------------------|
| CS15D-48F-3U-TC-LD | 0°C to 70°C |
| CS15D-48F-3U-TI-LD | -40°C to 85°C |

DIAGNOSTICS

| PARAMETER | RANGE | ACCURACY | UNIT | CALIBRATION |
|--------------|------------|----------|------|-------------|
| Temperature | -40 to 95 | ±3 | °C | External |
| Voltage | 0 to VCC | ±0.1 | V | |
| Bias Current | 0 to 120 | ±5 | mA | |
| TX Power | -5 to +6 | ±3 dB | dBm | |
| RX Power | -28 to -10 | ±3 dB | dBm | |

ABSOLUTE MAXIMUM RATINGS

| PARAMETER | SYMBOL | MIN | MAX | UNIT |
|---------------------|-----------------|------|-----------------|------|
| Storage Temperature | T _S | -40 | 85 | °C |
| Supply Voltage | V _{CC} | -0.5 | 4.0 | V |
| Input Voltage | V _{IN} | -0.5 | V _{CC} | V |
| Operating Current | I _{OP} | - | 400 | mA |

RECOMMENDED OPERATING CONDITIONS


| PARAMETER | SYMBOL | MIN | MAX | UNIT | NOTES |
|----------------------------|-----------------------------------|-----|-----|------|--------------------|
| Case Operating Temperature | T _C | 0 | 70 | °C | CS15D-48F-3U-TC-LD |
| | | -40 | 85 | | CS15D-48F-3U-TI-LD |
| Supply Voltage | V _{CC} | 3.1 | 3.5 | V | |
| Supply Current | I _{TX} + I _{RX} | - | 300 | mA | |

TRANSMITTER ELECTRO-OPTICAL CHARACTERISTICS (V_{CC} = 3.1V to 3.5V, T_C = 0°C to 70°C, -40°C to 85°C)

| PARAMETER | SYMBOL | MIN | TYP. | MAX | UNIT | NOTES |
|---|---|------|------|------|-------|---------|
| Output Optical Power 9/125um fiber | P _{out} | -2 | - | +3 | dBm | Average |
| Extinction Ratio | ER | 8.2 | - | - | dB | |
| Center Wavelength | λ _c | 1530 | 1550 | 1570 | nm | |
| Spectral Width (-20dB) | Δλ | - | - | 1 | nm | |
| Side Mode Suppression Ratio | SMSR | 30 | - | - | dB | |
| Output Eye | Compliant with Telcordia GR-253-CORE Issue 3 and ITU-T recommendation G-957 | | | | | |
| Max. P _{out} TX-DISABLE Asserted | P _{OFF} | - | - | -45 | dBm | |
| Differential Input Voltage | V _{DIFF} | 0.4 | - | 2.0 | V | |
| Optical Path Penalty | | | | 2 | dB | |
| Maximum Dispersion | | | | 1680 | ps/nm | |

RECEIVER ELECTRO-OPTICAL CHARACTERISTICS ($V_{CC} = 3.1V$ to $3.5V$, $T_c = 0^\circ C$ to $70^\circ C$, $-40^\circ C$ to $85^\circ C$)

| PARAMETER | SYMBOL | MIN | TYP. | MAX | UNIT | NOTES |
|---|-------------|------|------|----------|------|-------------------------|
| Optical Input Power-Maximum | P_{IN} | -8 | - | - | dBm | BER< 10^{-10} |
| RX Sensitivity @2.67 Gb/s | P_{IN} | - | - | -28 | dBm | PRBS23, BER< 10^{-10} |
| RX Sensitivity @OC-48 | P_{IN} | - | - | -28 | dBm | PRBS23, BER< 10^{-10} |
| RX Sensitivity @2xFC | P_{IN} | - | - | -28 | dBm | PRBS7, BER< 10^{-12} |
| RX Sensitivity @GbE | P_{IN} | - | - | -28 | dBm | PRBS7, BER< 10^{-12} |
| RX Sensitivity @OC-12 | P_{IN} | - | - | -28 | dBm | PRBS23, BER< 10^{-10} |
| RX Sensitivity @OC-3 | P_{IN} | - | - | -28 | dBm | PRBS23, BER< 10^{-10} |
| RX Sensitivity @Fast Ethernet | P_{IN} | - | - | -28 | dBm | PRBS7, BER< 10^{-10} |
| Operating Center Wavelength | λ_c | 1260 | - | 1610 | nm | |
| Optical Return Loss | ORL | -27 | - | - | dB | |
| Signal Detect-Asserted | P_A | - | - | -28 | dBm | |
| Signal Detect-Deasserted | P_D | -45 | - | - | dBm | |
| Differential Output Voltage | V_{DIFF} | 0.5 | - | 1.2 | V | |
| Receiver Loss of Signal Output Voltage-Low | RX_LOSL | 0 | - | 0.5 | V | |
| Receiver Loss of Signal Output Voltage-High | RX_LOSH | 2.4 | - | V_{CC} | V | |

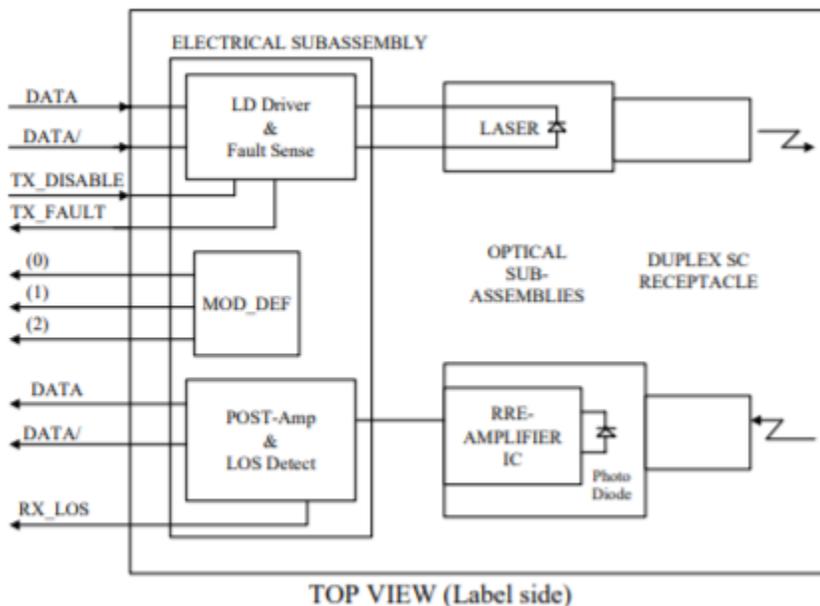BLOCK DIAGRAM OF TRANSCEIVER


Transmitter Section - The transmitter section consists of a 1550 nm InGaAsP laser in an eye safe optical subassembly (OSA) which mates to the fiber cable. The laser OSA is driven by a LD driver IC which converts differential input LVPECL logic signals into an analog laser driving current.

TX_DISABLE - The TX_DISABLE signal is high (TTL logic "1") to turn off the laser output. The laser will turn on when TX_DISABLE is low (TTL logic "0").


Receiver Section - The receiver utilizes an APD photodiode mounted together with a trans-impedance preamplifier IC in an OSA. This OSA is connected to a circuit providing post-amplification quantization, and optical signal detection.

Receive Loss (RX_LOS) - The RX_LOS is high (logic "1") when there is no incoming light from the companion transceiver. This signal is normally used by the system for the diagnostic purpose. The signal is operated in TTL level.

ASSEMBLY DRAWING (unit: mm)

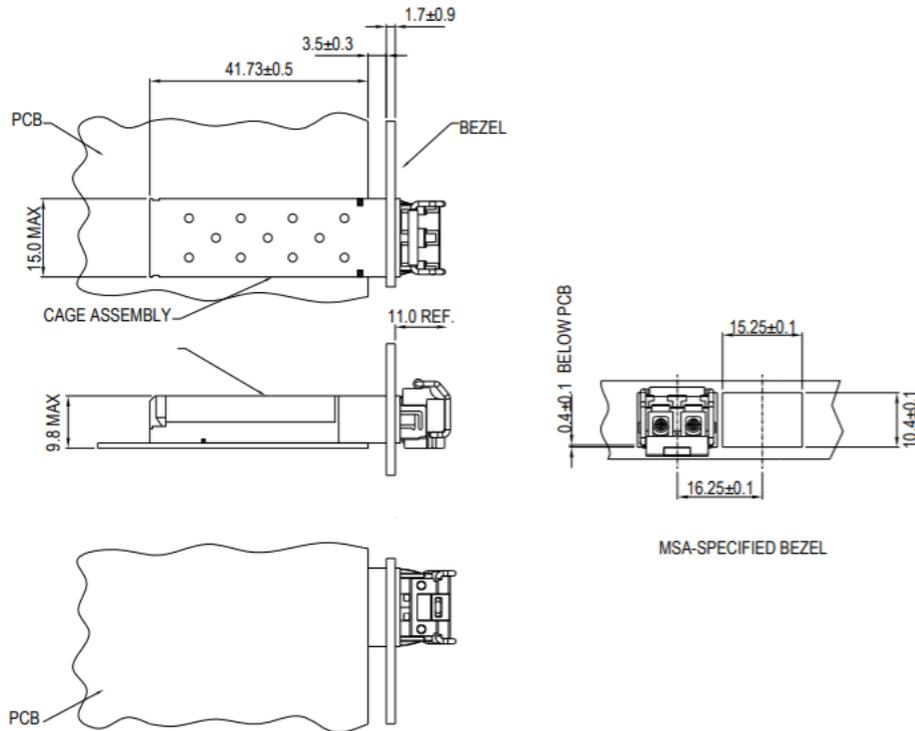

PIN ASSIGNMENT



| PIN | SIGNAL NAME | DESCRIPTION | PIN | SIGNAL NAME | DESCRIPTION |
|-----|------------------|---|-----|------------------|--|
| 1 | T _{GND} | Transmit Ground | 11 | R _{GND} | Receiver Ground |
| 2 | TX_FAULT | Transmit Fault | 12 | RX- | Receive Data Bar, Differential PECL, ac coupled |
| 3 | TX_DISABLE | Transmit Disable | 13 | RX+ | Receive Data, Differential PECL, ac coupled |
| 4 | MOD_DEF (2) | SDA Serial Data Signal | 14 | R _{GND} | Receiver Ground |
| 5 | MOD_DEF (1) | SCL Serial Clock Signal | 15 | V _{CCR} | Receiver Power Supply |
| 6 | MOD_DEF (0) | TTL Low | 16 | V _{CCT} | Transmitter Power Supply |
| 7 | RATE_SELECT | Open Circuit | 17 | T _{GND} | Transmitter Ground |
| 8 | RX_LOS | Receiver Loss of Signal, TTL High, open collector | 18 | TX+ | Transmit Data, Differential PECL, ac coupled |
| 9 | R _{GND} | Receiver Ground | 19 | TX- | Transmit Data Bar, Differential PECL, ac coupled |
| 10 | R _{GND} | Receiver Ground | 20 | T _{GND} | Transmitter Ground |

EYE SAFETY MARK

The single-mode transceiver is a class 1 laser product. It complies with EN 60825-1 and FDA 21 CFR 1040.10 and 1040.11. In order to meet laser safety requirements, the transceiver shall be operated within the Absolute Maximum Ratings.

Required Mark

Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11

[Caution] All adjustments have been done at the factory before the shipment of the devices. No maintenance and user serviceable part is required. Tampering with and modifying the performance of the device will result in voided product warranty.

ADDITIONAL NOTES

- Avoid eye or skin exposure to laser radiations.
- The device is sensitive to electro-static discharge (ESD). The device should be handled with ESD proof tools. To assemble the device on PCB, proper grounding is required to prevent ESD.
- Specifications are subject to change without notice.



Lasermate Group, Inc.
19608 Camino De Rosa
Walnut, CA 91789 USA
Tel: (909)718-0999
Fax: (909)718-0998
sales@lasermate.com
www.lasermate.com