



## **940nm Diffractive Optical Element (DOE) Laser Module with 61,000-Random Dot Pattern, 3V PCB Driver**

**MDOE940A200R613**



### **Overview**

The Lasermate MDOE940A200R613 is a 940nm infrared laser module featuring a diffractive optical element (DOE) that produces a 61,000-random dot pattern. Designed for advanced structured light applications, the module includes a 3V PCB driver and adjustable focusing lens. Its invisible IR emission makes it well-suited for 3D sensing, facial recognition, gesture tracking, and machine vision in consumer and industrial devices.

### **Features**

- 940nm diffractive optical element (DOE) laser module
- 61,000-random dot pattern
- Field of View (FOV): 68° x 48.5° (H x V)
- Low distortion and high uniform pattern
- Flexible package for R&D evaluation
- Distance tunable projection
- PWM drivable
- IEC 60825 eye safety standards

### **Applications**

- Structured light for 3D sensing
- Machine vision

## Specifications

Electrical-Optical Characteristics						
Parameter	Symbol	Min.	Typ.	Max	Unit	Conditions
Threshold current	$I_{th}$	-	20	50	mA	25 °C
Operating current	$I_{op}$	-	270	320	mA	
Operating voltage	$V_{op}$	1.6	2.0	2.4	V	
Power input with PCB			3	3	V	25 °C
Wavelength	$\lambda$	930	940	950	nm	$P_o=200mW$
Differential efficiency	$\eta$	0.6	0.8	1.2	mW/mA	$P_o=200mW$

Laser Diode Power Ratings					
Parameter	Symbol	Rating	Unit	Conditions	
CW output power (max)		200	mW		
Operating temperature	$T_{op}$	-10 to 60	°C		
Storage temperature	$T_{stg}$	-40 to 85	°C		

Mechanical Characteristics	
Diameter	8mm
Length	14~15mm
PCB driver	9(W) x 12(L) x 3(H)mm

### Notes:

- Length varies as the position of the collimating lens varies case by case.
- Total module length varies with the length of metal pins left after welding.


Optical Specifications	
Total dots	61,000
Field of View (FOV)	68° x 48.5° (HxV)
Contrast <sup>1</sup>	$\geq 2$
Uniformity <sup>2</sup> in FOV at 1m	$\geq 45\%$
Zero order <sup>3</sup>	$\leq 0.2\%$

<sup>1</sup> Contrast: in the defined area, the ratio of the 95th percentile of the grayscale value over the mode grayscale value of the background,  $C=I_{95\%}/I_{median}$

<sup>2</sup> Uniformity: the ratio of the grayscale value of the area at a given location to the grayscale value of the area in the center of the pattern,  $U=I_{each\ area}/I_{max\ of\ each\ area}$

<sup>3</sup> Zero order: (Power meter reading with DOE / Power meter reading without DOE) x 100%

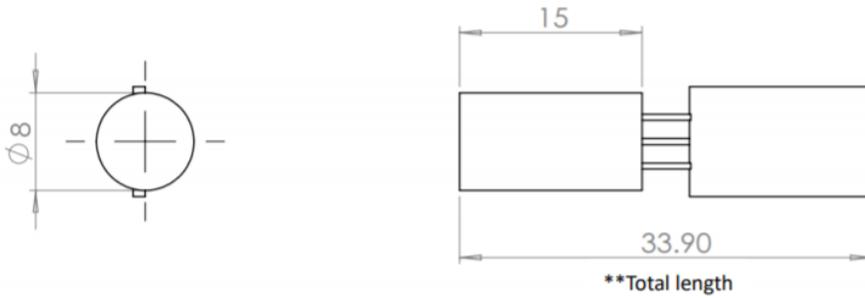

**Outline Dimensions (unit: mm)****Projection Pattern****Additional Notes**

- Treat heat dissipation before setting the module to full power
- Avoid touching the emitting area or optical components of the module.
- Never look directly at the light from the emitting area.
- The laser modules are designated solely as OEM components for incorporation into the customer's end products. Therefore, it is the customer's responsibility to comply with the appropriate requirements of FDA 21CFR, section 1040.10 and 1040.11 for complete laser products. For the code of FDA regulations, please refer to [FDA Performance Standards for Light-Emitting Products](#) for detailed information.
- Specifications are subject to change without notice.



**Lasermate Group, Inc.**  
19608 Camino De Rosa  
Walnut, CA 91789 USA  
Tel: (909)718-0999  
Fax: (909)718-0998  
[sales@lasermate.com](mailto:sales@lasermate.com)  
[www.lasermate.com](http://www.lasermate.com)