



T13D-PY5-2I-RF

1310nm Coaxial DFB Pigtail Laser Diode with Isolator, RF over Fiber

Description

The Lasermate T13D-PY5-2I-RF is a 1310nm wavelength, Distributed Feedback (DFB) laser diode in pigtailed package with output power >5mW, with isolator, and designed for use in RF over Fiber application.



Features

- 1310nm InGaAsP/InP MQW-DFB laser diode (LD)
- Uncooled operation at -20 to 85°C
- Hermetically sealed active component
- Low threshold current
- High performance, high speed InGaAs monitor PIN photodiode (PD)
- With single-stage isolator

Packaging

- Single-mode Fiber pigtailed with FC/ST/SC/LC connector

Applications

- SONET OC-12/OC-48 / SDH STM-4/STM-16
- Stable emitting source
- Gigabit Ethernet
- RF over Fiber

Ordering Information

Read Model No.	T13D-PY5-2I-RF
T13D = Laser	1310nm DFB laser
P = Package	Pigtailed with 9/125um SM fiber
Y = Connector	FC/PC (FC); SC/PC (SC); ST/PC (ST); LC/PC (LC); FC/APC (FA); SC/APC (CA); ST/APC (TA); LC/APC (LA)
5 = Output power	>5mW
2 = Operating temperature	-20 to 85°C
I = Isolator	With isolator
RF	RF over Fiber



Specifications


Absolute Maximum Ratings				
Parameters	Symbol	Value	Unit	Conditions
Storage temperature	Tstg	-40 to +85	°C	
Operating case temperature	Top	-20 to +85	°C	
Forward current (LD)	I _{FLD}	150	mA	
Reverse voltage (LD)	V _{RLD}	2	V	
Reverse current (PD)	I _{RPD}	2	mA	
Reverse voltage (PD)	V _{RPD}	20	V	
Soldering temperature	Stemp	260	°C	10 seconds

Electro-Optical Characteristics (CW @ T _c = 25°C unless otherwise noted)						
Parameters	Symbol	Min.	Typ.	Max.	Unit	Conditions
Threshold current	I _{th}	-	6	10	mA	CW
Operating voltage	V _{op}	-	1.15	1.5	V	CW, Pf
Fiber output power	Pf	5.0	-	-	mW	CW, I _f =I _{th} +30mA
Peak wavelength	λ _p	1290	-	1330	nm	CW, Pf
Side mode suppression ratio	SMSR	35	42	-	dB	CW, Pf
Optical isolation	OS	30	35	-	dB	@1310nm, Pf
Rise time	t _r	-	-	120	ps	I _b = I _{th} , 20%~80%
Fall time	t _f	-	-	120	ps	I _b = I _{th} , 20%~80%
Monitor current	I _m	0.1	-	1.0	mA	Pf, V _{rp} =5V
Monitor dark current	I _d	-	-	0.1	uA	V _{rp} =5V
Monitor capacitance	C	-	10	20	pF	V _{rp} =5V, f=1MHz
Tracking error	ΔPf/ Pf	-	±0.7	±1.5	dB	APC, T _c =-40~+85°C


Fiber Pigtail Specifications					
Parameters	Symbol	Min.	Typ.	Max.	Unit
Fiber type	Single Mode Fiber (Flame Retardant Hytrel Coating)				
Cladding diameter	D _{cl}	122	125	128	um
Mode field diameter	D _{mf}	-	10	-	um
Coating diameter	D _{bc}	-	0.9	1	mm
Pigtail length*	L	15	25	35	cm
Bending radius	R _b	30	-	-	mm
Connector	TBD				

*From the ferrule-end to the bottom of TO-header.

Outline Dimensions (unit: mm)

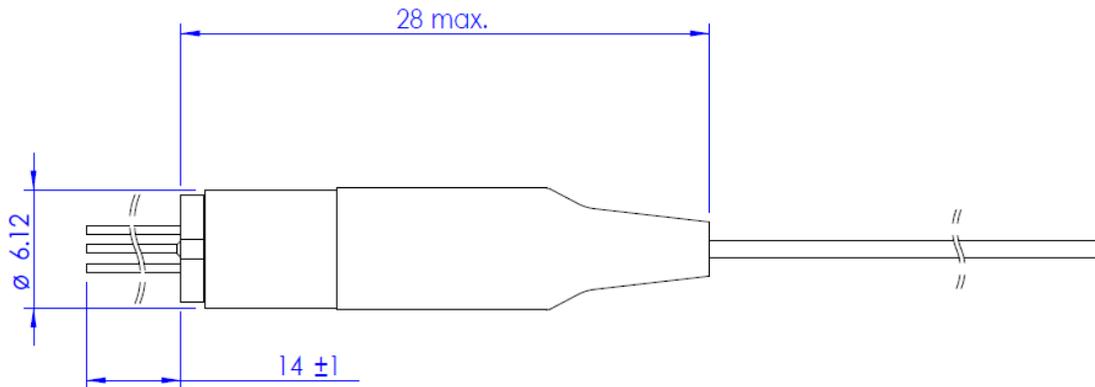

Pin Assignment

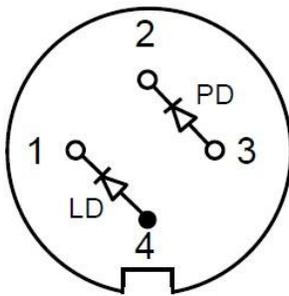

- | |
|---|
| <p>1: LD Cathode</p> <p>2: PD Cathode</p> <p>3: PD Anode</p> <p>4: LD Anode</p> |
|---|

Additional Notes

- Avoid eye or skin exposure to laser radiations.
- The device is sensitive to electro-static discharge (ESD). The device should be handled with ESD proof tools. To assemble the device on PCB, proper grounding is required to prevent ESD.
- Specifications are subject to change without notice.