



T65D-PYZ-WM-I-D

1650nm Coaxial DFB Pigtail Laser Diode with Optional Isolator



Description

The Lasermate T65D-PYZ-WM-I-D is a 1650nm Distributed Feedback (DFB) laser diode in a coaxial pigtailed package with single-mode fiber. Designed for telecom applications, it delivers output power above 2mW and optionally includes a single-stage isolator. With a built-in InGaAs monitor photodiode and hermetically sealed MQW structure, it supports data rates up to 2.5Gbps and provides reliable, stable optical performance over a wide operating temperature range.

Features

- 1650nm InGaAsP/InP MQW-DFB laser diode (LD)
- Data Rate: 155Mbps up to 2.5Gbps
- Uncooled operation at -40 to 85°C
- Hermetically sealed active component
- Built-in high performance, high speed InGaAs monitor PIN photodiode (PD)
- Based on Telcordia reliability
- Optional with single-stage isolator

Packaging

- Single-mode Fiber pigtailed with optional FC/ST/SC/LC connector

Applications

- ATM/SONET OC-3/OC-12/OC-24
- SDH STM-1/STM-4/STM-8
- Stable emitting source at specific wavelength

Ordering Information

Read Model No.	T65D-PYZ-WM-I-D
T62D = Laser	1650nm DFB laser
P = Package	Pigtailed with 9/125um SM fiber
Y = Connector	None (NO) ; FC/PC (FC) ; SC/PC (SC) ; ST/PC (ST) ; LC/PC (LC) ; FC/APC (FA) ; SC/APC (CA) ; ST/APC (TA)
Z = Output power	>0.5mW (M) ; >1mW (H) ; >2mW (2)
W = Pin configuration	A pinout (A) ; C pinout (C)
M = Mount	No flange (0) ; Horizontal mount (1)
I = Isolator	Without isolator (N) ; With isolator (I)
D = Data rate	1.25Gbps (1G) ; 2.5Gbps (2G)



Specifications

Absolute Maximum Ratings				
Parameters	Symbol	Value	Unit	Conditions
Storage temperature	Tstg	-40 to +85	°C	
Operating case temperature	Top	-40 to +85	°C	
Peak optical output power	Po	5	mW	
Forward current (LD)	I _{FLD}	100	mA	
Reverse voltage (LD)	V _{RLD}	2	V	
Reverse current (PD)	I _{RPD}	5	mA	
Reverse voltage (PD)	V _{RPD}	15	V	
Soldering temperature	Stemp	260	°C	10 seconds


Electro-Optical Characteristics (CW @ T _c = 25°C unless otherwise noted)						
Parameters	Symbol	Min.	Typ.	Max.	Unit	Conditions
Central wavelength	λ_c	1645	1650	1655	nm	CW, Pf
Side mode suppression ratio	SMSR	30	40	-	dB	Pf
Spectral width	$\Delta\lambda$	-	0.2	1	nm	Pf
Threshold current	I _{th}	-	10	15	mA	CW
Fiber output power	Pf	0.5			mW	CW, I _f =I _{th} +20mA
		1.0				
		2.0				
Operating voltage	V _{op}	-	1.1	1.5	V	Pf
Rise time / Fall time	t _r /t _f	-	0.1	0.2	nsec	I _b = I _{th} , 20%~80%
Monitor current	I _m	100	-	1000	uA	Pf, V _{rp} =5V
Monitor dark current	I _d	-	0.1	100	nA	V _{rp} =5V
Monitor capacitance	C	-	10	20	pF	V _{rp} =5V, f=1MHz
Tracking error*	Δ Pf/ Pf	-	±1.0	±1.5	dB	APC, T _c =-40~+85°C

*I_m=constant @ Pf, T_c=25 °C


Fiber Pigtail Specifications						
Parameters	Symbol	Min.	Typ.	Max.	Unit	
Fiber type	Single Mode Fiber (Flame Retardant Hytrel Coating)					
Cladding diameter	D _{cl}	122	125	128	um	
Mode field diameter	D _{mf}	-	10	-	um	
Coating diameter	D _{bc}	-	0.9	1	mm	
Pigtail length*	L	0.9	1.0	1.1	m	
Bending radius	R _b	30	-	-	mm	
Connector	TBD					

*From the ferrule-end to the bottom of TO-header.

Outline Dimensions (unit: mm)

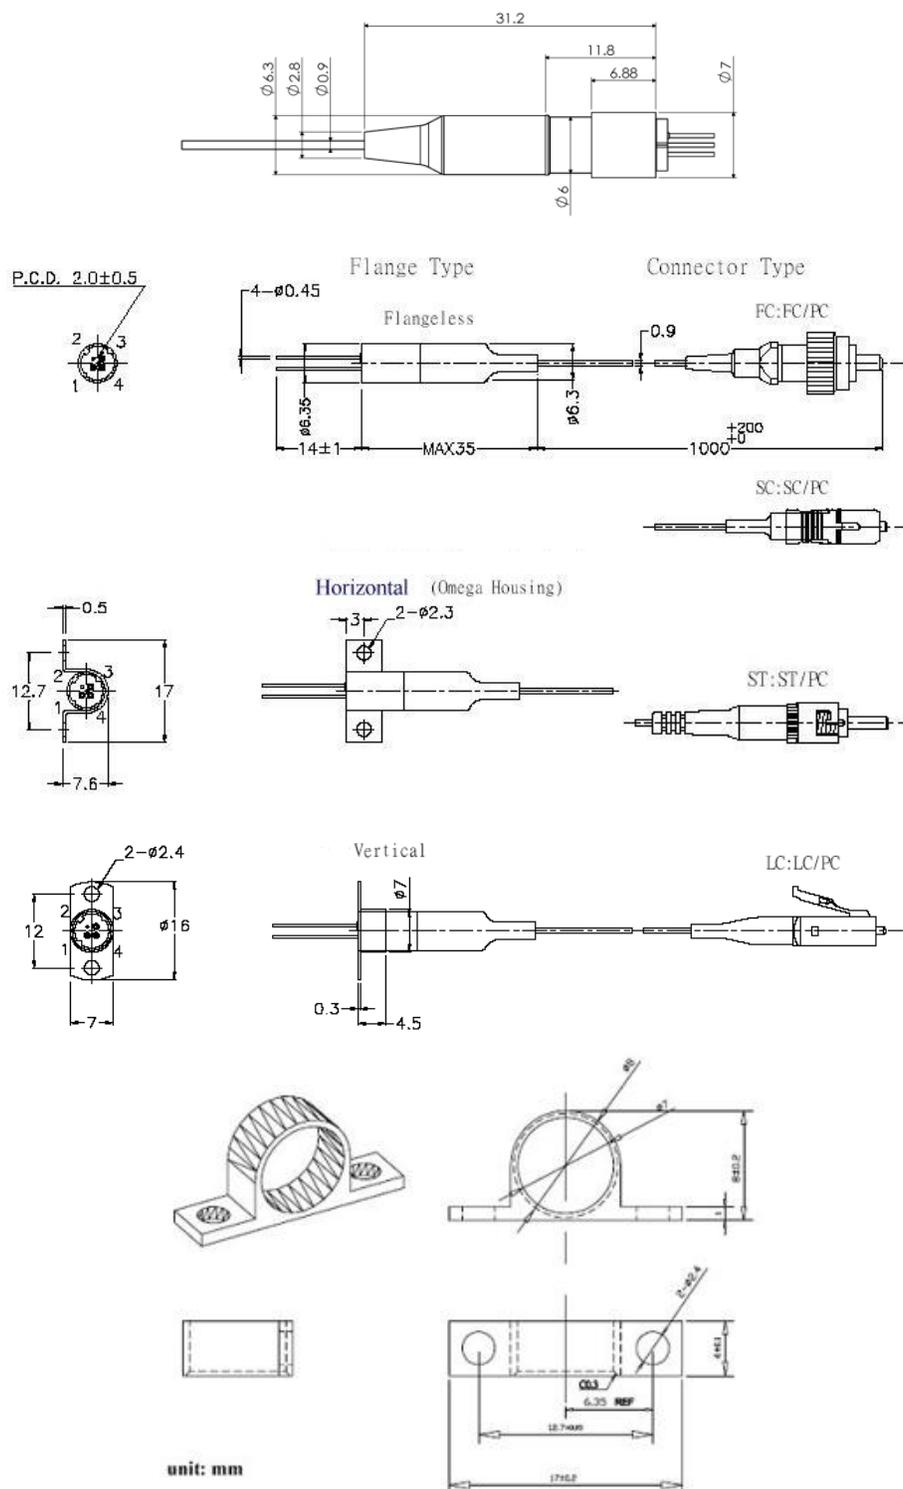

Pin Assignment

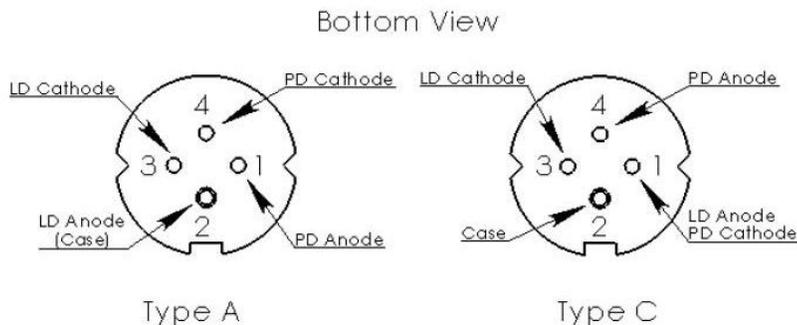

Pin Number	Type A	Type C
1	PD Anode	LD Anode, PD Cathode
2	LD Anode (case)	Case
3	LD Cathode	LD Cathode
4	PD Cathode	PD Cathode

Additional Notes

- Avoid eye or skin exposure to laser radiations.
- The device is sensitive to electro-static discharge (ESD). The device should be handled with ESD proof tools. To assemble the device on PCB, proper grounding is required to prevent ESD.
- Specifications are subject to change without notice.